
ST17H30Q

15W SoC for Wireless Power Transmitter with Built-in Bluetooth-LE

DS-ST17H30Q-E15

Keyword:

Features; Package; Pin layout; Memory; MCU;
Working mode; Wakeup source; RF Transceiver;
Baseband; Clock; Timers; Interrupt; Interface;
QDEC; ADC; PWM; Electrical specification; Application

Brief:

This datasheet is dedicated for Lenze Wireless Power Transmitter, supported WPC1.2.4 Certificate, low cost BLE+2.4G dual mode SoC ST17H30Q. In this datasheet, key features, working modes, main modules, electrical specification and application of the ST17H30 are introduced.



LENZE TECHNOLOGY



Published by

Lenze Technology

East 7th Floor, Ching Po Building, Special Zone Press Group, NO.6008 Shennan Road, Futian District Shenzhen

© Lenze Technology

All Right Reserved

Legal Disclaimer

Lenze Technology reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Lenze Technology disclaims any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Lenze Technology does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling Lenze Technology products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Lenze Technology for any damages arising or resulting from such use or sale.

Information:

For further information on the technology, product and business term, please contact Lenze Technology Company.

For sales or technical support, please send email to the address of:

billy@Lenzotech.com

info@Lenzotech.com

**Revision History**

Version	Major Changes	Date	Author
1.0	Initial release	2015/4	S.G.J., Y.C.Q, F.F., L.Y., Cynthia
1.1.0	Updated package dimension figure (Figure 1-2 in section 1.5), and section 1.2.2~1.2.3, 12.3~12.4	2015/6	X.S.J., L.Y., Cynthia
1.2.0	Added ordering information, package dimension, pin layout, GPIO lookup tables, pull-up/pull-down resistor and schematic for SOP16 package; Updated GP4&GP5 pin multiplexed function (I2C) for QFN24 package.	2015/7	S.G.J., L.X., H.Z.F., X.S.J., L.Y., Cynthia
1.3.0	Added IO drive strength information	2015/7	L.Y., Cynthia
1.4.0	Added TSSOP16 package information	2015/8	X.S.J., L.Y., Cynthia
1.5.0	Deleted IR mode	2015/10	L.Y., Cynthia
1.6.0	Deleted SOP16 package	2015/12	L.Y., Cynthia
1.7.0	Updated connection relationship between GPIO and related modules.	2016/2	S.G.J., Cynthia
1.8.0	Added eSOP8 package information; Added reference design for ST17H30QES16.	2016/3	X.X., X.S.J., L.X., Cynthia
1.9.0	Updated reference design for ST17H30QET24, ST17H30QES16 and ST17H30QEP8	2016/3	H.Z.F., L.X., Cynthia
2.0.0	Updated DC characteristics and ordering information.	2016/7	L.J.R., X.S.J., Cynthia
2.1.0	Updated package dimension for the ST17H30QES16	2016/7	X.S.J., Cynthia
2.2.0	Updated register configuration to	2016/10	Z.J.Q., Cynthia



Version	Major Changes	Date	Author
	select V_{GP23} or $1/3 * V_{GP23}$ as ADC input: digital register 0x2c[2:0], and analog register afe3V_reg02<3>.		
2.3.0	Updated WPC1.2. supported	2016/11	C.K.X., Cynthia
2.4.0	Updated 3.3V analog register table (3v_reg12 ~ 3v_reg45)	2016/12	C.K.X., Cynthia
2.5.0	Official version for ST17H30QET24	2017/2	Cynthia
2.6.0	Updated WPC1.2.3 supported	2017/5	Billy
2.7.0	Updated WPC1.2.4 supported, updated EPP(MP-A11) supported	2018/3	Billy



1 Table of contents

1	Overview	10
1.1	Block diagram	10
1.2	Key features.....	11
1.2.1	General features.....	11
1.2.2	RF Features.....	12
1.2.3	Features of power management module.....	12
1.3	Typical application.....	13
1.4	Ordering information	13
1.5	Package.....	13
1.6	Pin layout.....	15
1.7	Lenze SDK	17
2	Memory	17
3	MCU	18
3.1	Working modes	18
3.1.1	Active mode.....	19
3.1.2	Idle mode.....	19
3.1.3	Power-saving mode	19
3.1.3.1	Brief introduction	19
3.1.3.2	Register configuration of power-saving mode.....	20
3.1.3.3	Wakeup source	24
3.1.3.3.1	Wakeup source – GPIO	24
3.1.3.3.2	Wakeup source – QDEC	24
3.1.3.3.3	Wakeup source – 32K timer	24
3.1.3.3.4	Wakeup source – pad.....	24
3.1.3.4	Transition sequence.....	25
3.2	Reset.....	26
4	2.4G RF Transceiver	27
4.1	Block diagram	27
4.2	Function description.....	28
4.3	Baseband	28
4.3.1	Packet format	28
4.3.2	RSSI	28
5	Clock.....	28



5.1	System clock	29
5.1.1	System clock sources	29
5.1.2	FHS select	30
5.1.3	HS divider clock	30
5.2	Module clock	30
5.2.1	SAR ADC clock.....	30
5.3	Register table	30
6	Timers	32
6.1	Timer0~Timer2	32
6.1.1	Register table	32
6.1.2	Mode0 (System Clock Mode)	34
6.1.3	Mode1 (GPIO Trigger Mode)	35
6.1.4	Mode2 (GPIO Pulse Width Mode)	36
6.1.5	Mode3 (Tick Mode)	37
6.1.6	Watchdog	37
6.2	32K LTIMER.....	38
6.3	System timer	39
7	Interrupt System	40
7.1	Interrupt structure	40
7.2	Register configuration	40
7.2.1	Enable/Mask interrupt sources	41
7.2.2	Interrupt mode and priority	41
7.2.3	Interrupt source flag.....	42
8	Interface.....	42
8.1	GPIO	42
8.1.1	Basic configuration	43
8.1.1.1	Multiplexed functions.....	43
8.1.1.2	Drive strength	45
8.1.2	Connection relationship between GPIO and related modules	46
8.2	I2C.....	49
8.2.1	Pin configuration	49
8.2.2	Lenze I2C communication protocol	49
8.2.3	Register table	50



8.2.4	I2C Slave mode	51
8.2.4.1	DMA mode	52
8.2.4.2	Mapping mode	53
8.2.4.3	Command analysis mode	53
8.3	SWS	54
8.4	Pull-up/Pull-down resistor.....	54
9	Quadrature Decoder	56
9.1	Input pin selection.....	56
9.2	Common mode and double accuracy mode.....	56
9.3	Read real time counting value.....	58
9.4	QDEC interrupt	59
9.5	QDEC reset	59
9.6	Other configuration.....	59
9.7	Register table	60
10	SAR ADC	61
10.1	Register table	61
10.2	SAR ADC clock.....	62
10.3	Select ADC range, resolution and sampling time	62
10.4	Select input mode and channel.....	63
10.5	ADC start	63
10.6	ADC status	63
10.7	ADC data.....	64
11	PWM	64
11.1	Register table	64
11.2	Enable PWM.....	66
11.3	Set PWM clock.....	66
11.4	PWM waveform, polarity and output inversion.....	66
11.4.1	PWM waveform.....	67
11.4.2	Invert PWM output	67
11.4.3	Polarity for signal frame	67
11.5	PWM mode	68
11.5.1	Select PWM mode	68
11.5.2	Continuous mode	68
11.5.3	Counting mode.....	69
11.6	PWM interrupt	69
12	Key Electrical Specifications	69
12.1	Absolute maximum ratings	69



12.2	Recommended operating condition.....	70
12.3	DC characteristics	70
12.4	AC characteristics	71
13	Application	75
13.1	Application example for the ST17H30QET24	75
13.1.1	Schematic	75
13.1.2	Layout.....	77
13.1.3	BOM (Bill of Material).....	77



2 Table of Figures

Figure 1- 1	Block diagram of the system.....	11
Figure 1- 2	Package dimension for the ST17H30QET24 (Unit: mm)	14
Figure 1- 3	Pin assignment for the ST17H30QET24	15
Figure 2- 1	Physical memory map.....	17
Figure 2- 2	MCU memory map	18
Figure 3- 1	Block diagram	18
Figure 3- 2	Transition chart of working modes	19
Figure 3- 3	Wakeup source	25
Figure 4- 1	Block diagram of RF transceiver	27
Figure 5- 1	Block diagram of system clock.....	29
Figure 8- 1	Logic relationship between GPIO and related modules	47
Figure 8- 2	I2C timing chart	50
Figure 8- 3	I2C slave address	52
Figure 8- 4	Read format in I2C DMA mode.....	52
Figure 8- 5	Write format in I2C DMA mode.....	53
Figure 8- 6	Read format in I2C Mapping mode.....	53
Figure 8- 7	Write format in I2C Mapping mode.....	53
Figure 9- 1	Common mode	57
Figure 9- 2	Double accuracy mode	58
Figure 9- 3	Read real time counting value	59
Figure 9- 4	Shuttle mode	60
Figure 11- 1	PWM output waveform chart.....	68
Figure 11- 2	Continuous mode	68
Figure 11- 3	Counting mode	69
Figure 13- 1	Schematic for the ST17H30QET24.....	76
Figure 13- 2	Layout for the ST17H30QET24.....	77



3 Table of Tables

Table 1- 1	Ordering information of the ST17H30Q	13
Table 1- 2	Pin functions for the ST17H30QET24	15
Table 3- 1	Registers in digital core.....	20
Table 3- 2	3.3V analog registers (afe3V_reg05 ~ afe3V_reg06) (bit).....	20
Table 3- 3	3.3V analog registers (3v_reg12 ~ 3v_reg45)	22
Table 3- 4	Register configuration for reset, wakeup and power down enabling.....	26
Table 4- 1	Packet Format.....	28
Table 5- 1	Register table for clock	30
Table 6- 1	Register configuration for Timer0~Timer2	32
Table 6- 2	3.3V analog register table for LTIMER	39
Table 6- 3	Register table for System Timer.....	40
Table 7- 1	Register table for Interrupt system.....	40
Table 8- 1	GPIO lookup table 1 for the ST17H30QET24	43
Table 8- 2	IO drive strength for ST17H30QET24.....	45
Table 8- 3	GPIO lookup table 2 for the ST17H30QET24	48
Table 8- 4	I2C pin configuration	49
Table 8- 5	Register table for I2C	50
Table 8- 6	3.3V analog registers related to Pull-up/Pull-down resistor	54
Table 9- 1	Input pin selection	56
Table 9- 2	Register table for QDEC	60
Table 10- 1	Register table for SAR ADC	61
Table 11- 1	Register table for PWM	64
Table 12- 1	Absolute Maximum Ratings.....	69
Table 12- 2	Recommended operation condition.....	70
Table 12- 3	DC characteristics	70
Table 12- 4	AC Characteristics	71
Table 13- 1	BOM table for the ST17H30QET24	77



1 Overview

The ST17H30Q is Lenze-developed wireless power transmitter, support WPC1.2.4 standard, single coil quick charge transmission, compliant all kinds of receiving equipment of international wireless charging standard, such as smart phones, smart watches, anti-corrosion and IoT products, power input support QC2.0/QC3.0 adapter. ultra-low cost BLE and 2.4G dual mode SoC solution which is fully standard compliant and allows easy connectivity with Bluetooth Smart Ready mobile phones, tablets, laptops. It's completely RoHS-compliant and 100% lead (Pb)-free.

1.1 Block diagram

The ST17H30Q is designed to offer ultra-low cost, high efficiency wireless power transmitter, low power Bluetooth Smart application capabilities, which integrates powerful 32-bit MCU, advanced BLE/2.4G Radio, 16KB on-chip OTP, 6KB on-chip SRAM, a 10bit ADC, a quadrature decoder (QDEC), up to four-channel PWM, flexible I/O interfaces, and nearly all of the peripheral blocks needed for Bluetooth Low Energy applications development.

The system's block diagram is as shown in Figure 1-1:

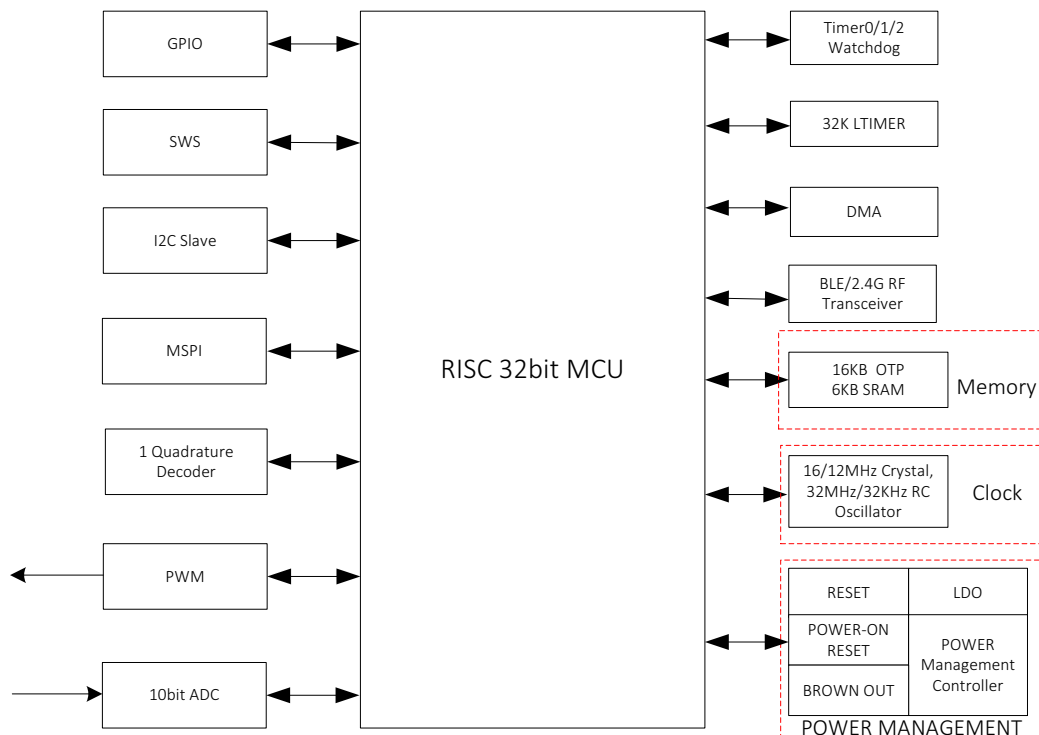




Figure 1- 1 Block diagram of the system

Based on the ST17H30Q with high-volume-assembly and high integration, few external components are needed to satisfy customers' ultra-low cost requirement.

1.2 Key features

1.2.1 General features

General features are as follows:

- 1) Compatible with WPC1.2/WPC1.2.3/WPC1.2.4 standard
- 2) Metal object detection(FOD)
- 3) Compatible with 15W/10W/5W(including Apple 7.5W fast charging), Automatic detect to set output power
- 4) Compatible with Apple Watch charge Standard (350mA charging current)
- 5) Conversion efficiency 85%
- 6) Detection distance: 0~10mm
- 7) Modulation method: ASK/FSK2-Way
- 8) Embed 32-bit ARM cortex M3 high performance MCU with clock up to 48MHz.
- 9) Program memory: 16KB on-chip OTP.
- 10) Data memory: 6KB on-chip SRAM.
- 11) 16/12MHz Crystal and 32KHz/32MHz embedded RC oscillator.
- 12) Up to 14 GPIOs depending on package option, with configurable internal pull-up or pull-down resistors.
- 13) Debug interface: SWS (Single Wire Slave).
- 14) Supports MSPI and I2C Slave interface.
- 15) Embeds a SAR ADC: Up to 10bit resolution and 4 input channels.
- 16) Embeds one quadrature decoder (QDEC).
- 17) Supports up to four-channel PWM output.
- 18) Embeds three general 32-bit timers Timer0~Timer2.
 - ✧ Timer0~Timer2 are available in active mode
 - ✧ Timer0~Timer1 supports four modes



✧ Generally Timer2 is programmable as watchdog

19) A low-frequency 32K timer LTIMER available in suspend mode or deep sleep mode.

20) Operating temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ industrial temperature range.

1.2.2 RF Features

RF features include:

- 1) BLE/2.4GHz RF transceiver embedded, working in worldwide 2.4GHz ISM band.
- 2) Adaptive frequency hopping.
- 3) Bluetooth 4.0 Compliant, 1Mbps data rate mode.
- 4) Rx Sensitivity: -94dBm at 1Mbps mode.
- 5) Tx output power up to $+6\text{dBm}$.
- 6) Auto acknowledgement and retry.
- 7) Single-pin antenna interface.
- 8) RSSI monitoring.

1.2.3 Features of power management module

Features of power management module include:

- 1) Power supply of $1.9\text{V}\sim 3.6\text{V}$.
- 2) Embedded LDO.
- 3) Battery monitor: Embedded low battery detection.
- 4) Multiple stage power management to minimize power consumption.
- 5) Low power consumption:
 - ✧ Transmitter mode current: 15mA @ 0dBm power, 22mA @ max power
 - ✧ Receiver mode current: 12mA
 - ✧ Suspend mode current: $10\mu\text{A}$
 - ✧ Deep sleep mode current: $0.7\mu\text{A}$



1.3 Typical application

The ST17H30Q is typically used for BLE (Bluetooth Low Energy) applications.

- ✧ Wireless Charger
- ✧ Beacon
- ✧ Find Me
- ✧ Selfie Shutter

1.4 Ordering information


Table 1- 1 Ordering information of the ST17H30Q

Product	Package Type	Temperature Range	Package Marking	Packing Method	Ordering Number	Minimum Order Quantity
ST17H30Q	24-pin 4X4mm TQFN	-40°C ~ +85°C	ST17H30QET24	TR	ST17H30QET24R	3000

*Note: Packing method “TR” means tape and reel.

1.5 Package

Package dimension for the ST17H30QET24 is shown as Figure 1- 2.

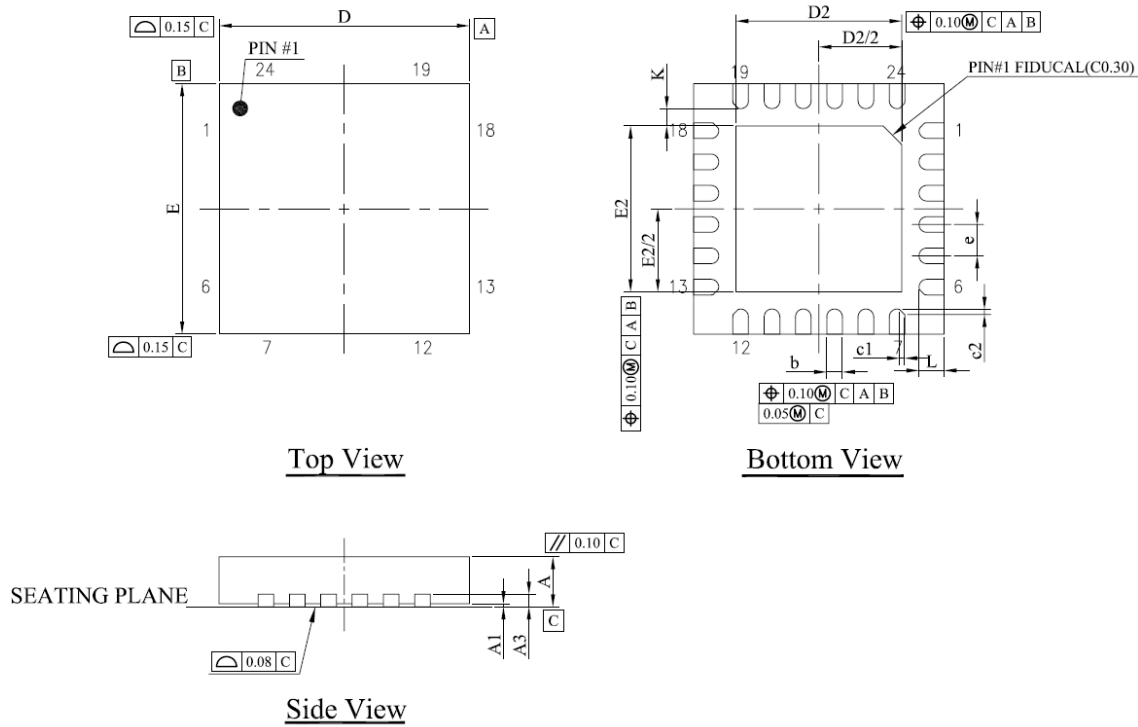

SYMBOL	DIMENSION (MM)			DIMENSION (MIL)		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	27.6	29.5	31.5
A1	0	0.02	0.05	0	0.8	2.0
A3	---	0.20REF	---	---	7.9REF	---
b	0.18	0.25	0.30	7.1	9.8	11.8
D	3.90	4.00	4.10	153.5	157.5	161.4
D2	2.55	2.65	2.75	100.4	104.3	108.3
E	3.90	4.00	4.10	153.5	157.5	161.4
E2	2.55	2.65	2.75	100.4	104.3	108.3
e	---	0.50BSC	---	---	19.7BSC	---
K	0.20	---	---	7.9	---	---
L	0.35	0.40	0.45	13.8	15.7	17.7
c1	---	0.08	---	---	3.1	---
c2	---	0.08	---	---	3.1	---

- NOTE:
1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M-1994.
 2. REFER TO JEDEC STD.MO-220 WGGD-6
 3. DIMENSION "b" APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.18 AND 0.30mm FROM TERMINAL TIP.
 4. LEADFRAME THICKNESS IS 0.203MM (8 MIL).
 5. DIMENSION "D" & "E" WILL INCLUDE ALL SIDE BURR INDUCED DURING ASSEMBLY.

Figure 1- 2 Package dimension for the ST17H30QET24 (Unit: mm)



1.6 Pin layout

Pin assignment for the ST17H30QET24 is as shown in Figure 1- 3:

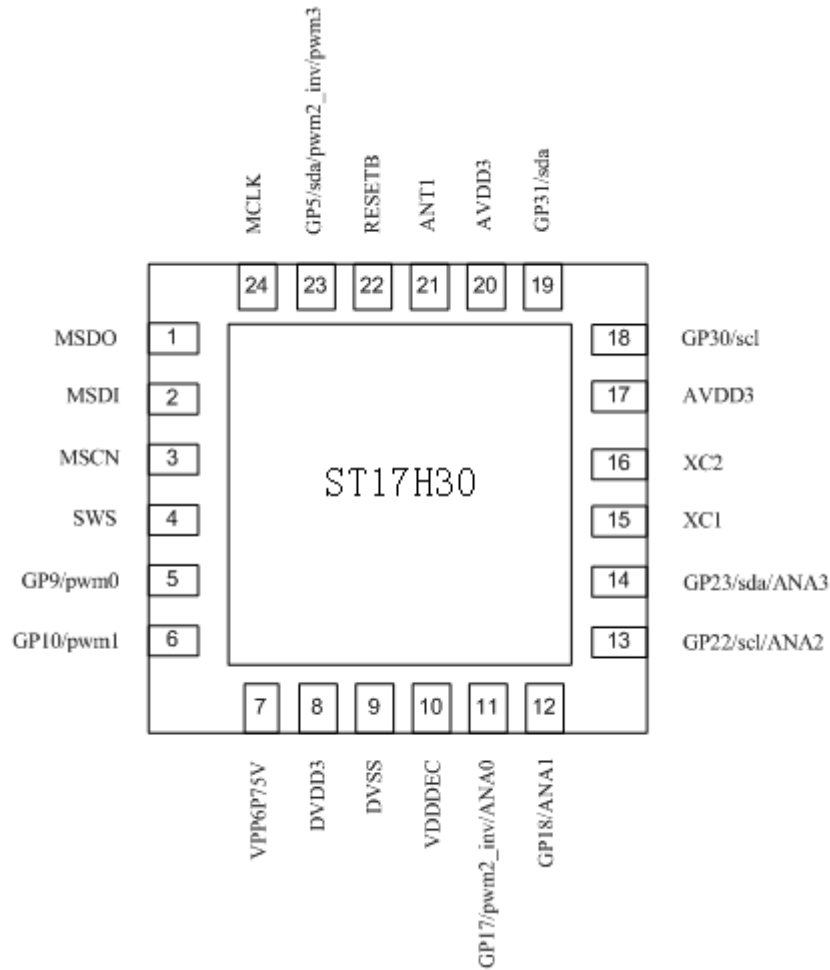


Figure 1- 3 Pin assignment for the ST17H30QET24

Functions of 24 pins for the ST17H30QET24 are described in Table 1-2:

Table 1- 2 Pin functions for the ST17H30QET24

QFN24 4X4			
No.	Pin Name	Pin Type	Description
1	MSDO	Digital I/O	Memory SPI data output/GPIO
2	MSDI	Digital I/O	Memory SPI data input/GPIO
3	MSCN	Digital I/O	Memory SPI chip-select(Active low)/GPIO
4	SWS	Digital I/O	single wire slave/GPIO
5	GP9/pwm0 #	Digital I/O	GPIO9/PWM0 output



QFN24 4X4			
No.	Pin Name	Pin Type	Description
6	GP10/pwm1 #	Digital I/O	GPIO10/PWM1 output
7	VPP6P75V	POWER	for OTP program 6.75V power supply
8	DVDD3	PWR	3.3V IO supply
9	DVSS	GND	Digital LDO ground
10	VDDDEC	PWR	Digital LDO 1.8V output
11	GP17/pwm2_inv/ANA0 *	Digital I/O	GPIO17/PWM2 inverting output/Analog input 0 for SAR ADC
12	GP18/ANA1 *	Digital I/O	GPIO18/Analog input 1 for SAR ADC
13	GP22/scl/ANA2 *	Digital I/O	GPIO22/I2C_SCL/Analog input 2 for SAR ADC
14	GP23/sda/ANA3 *	Digital I/O	GPIO23/I2C_SDA/Analog input 3 for SAR ADC
15	XC1	Analog I/O	16MHz crystal input+
16	XC2	Analog I/O	16MHz crystal input-
17	AVDD3	PWR	Analog 3.3V supply
18	GP30/scl	Digital I/O	GPIO30/I2C_SCL
19	GP31/sda *	Digital I/O	GPIO31/I2C_SDA
20	AVDD3	PWR	RF 3.3V supply
21	ANT1	Analog I/O	RF antenna
22	RESETB	Digital I	Power on reset, active low
23	GP5/sda/pwm2_inv/ pwm3 #	Digital I/O	GPIO5/I2C_SDA (not recommended)/PWM2 inverting output/PWM3 output
24	MCLK	Digital I/O	Memory SPI clock/GPIO

*Note:

(1) Pins with bold typeface can be used as GPIOs. Please refer to **Section 8.1** for details.

(2) The pins marked with an asterisk support configurable internal 1M Ω /10K Ω pull-up resistor or 100K Ω pull-down resistor which are disabled by default. The pins marked with a pound sign support internal 100K Ω pull-down resistor which is disabled by default. Please refer to **Section 8.4** for details about pull-up/pull-down resistor.

(3) The I2C interface only supports Slave mode.

(4) Pin drive strength: All the GPIO pins support drive strength of 4mA or 0.7mA (4mA



when “DS”=1, 0.7mA when “DS”=0) with the following exceptions: MCLK, MSDO, MSDI and MSCN support drive strength of 4mA or 2mA (4mA when “DS”=1, 2mA when “DS”=0); SWS supports drive strength of 8mA or 4mA (8mA when “DS”=1, 4mA when “DS”=0). “DS” configuration will take effect when the pin is used as output. Please refer to **Section 8.1 GPIO** for corresponding “DS” register address and the default setting.

1.7 Lenze SDK

A full featured SDK is provided with the chip for BLE applications. The customer can easily develop his own BLE applications by employing the firmware, along with the system configuration data composed according to the specific hardware design.

2 Memory

The ST17H30Q embeds 6KB data memory (SRAM), and 16KB program memory (OTP).

SRAM/Register memory map is shown as follows:

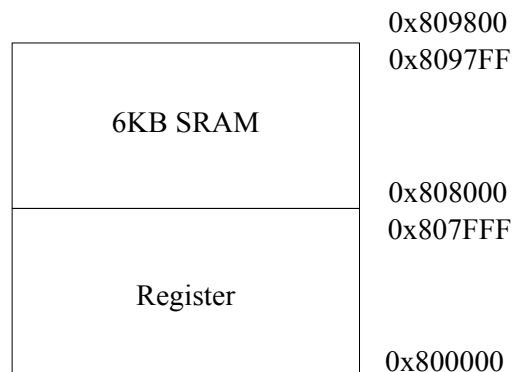


Figure 2- 1 Physical memory map

Register address: from 0x800000 to 0x807FFF;

6KB SRAM address: from 0x808000 to 0x809800.

Both register and 6KB SRAM address can be accessed via I2C Slave and SWS interface.

OTP/External flash address mapping is configurable.

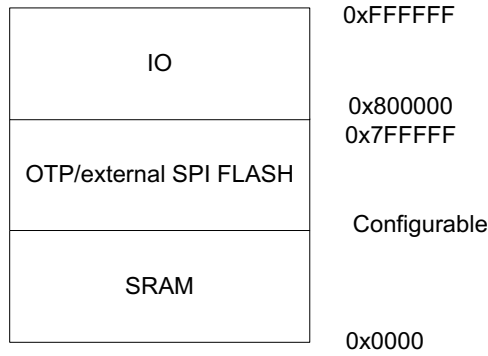


Figure 2- 2 MCU memory map

External FLASH address can be accessed via MSPI interface.

Address space starting from 0x800000 can be accessed via debug interface.

3 MCU

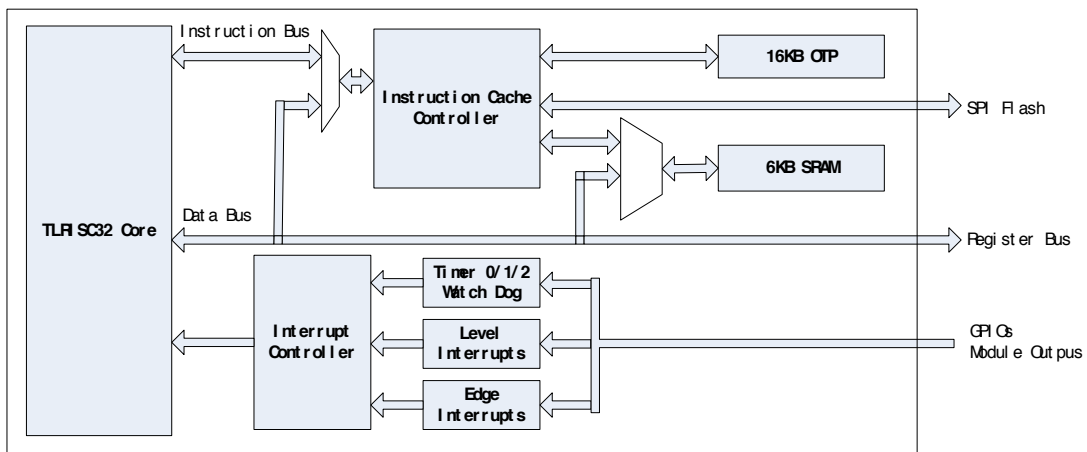


Figure 3- 1 Block diagram

The ST17H30Q integrates a powerful 32-bit MCU developed by Lenze. The digital core is based on 32-bit RISC, and the length of instructions is 16 bits; four hardware breakpoints are supported.

3.1 Working modes

The ST17H30Q has four working modes: Active, Idle, Suspend and Deep Sleep. This section mainly gives the description of every working mode and mode transition.

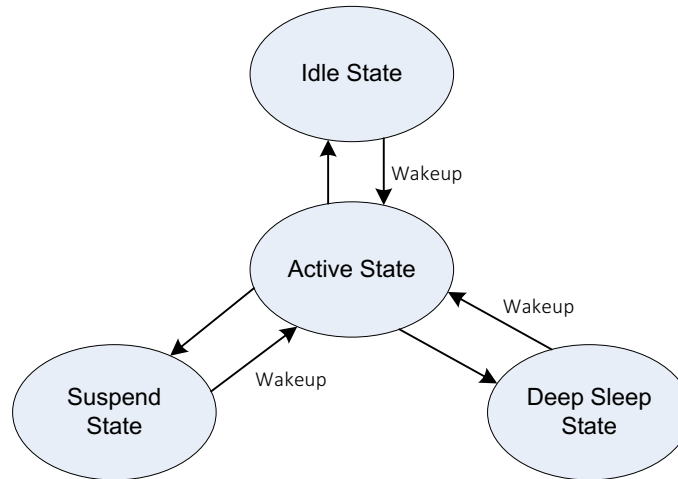


Figure 3- 2 Transition chart of working modes

3.1.1 Active mode

In active mode, the MCU block is at working state, and the ST17H30Q can transmit or receive data via its embedded RF transceiver. The RF transceiver can also be powered down if no data transfer is needed.

3.1.2 Idle mode

In Idle mode, the MCU block stalls, and the RF transceiver can be at working state or be powered down. The time needed for the transition from Idle mode to Active mode is negligible.

3.1.3 Power-saving mode

3.1.3.1 Brief introduction

For the ST17H30Q, there are two kinds of power-saving modes: suspend mode and deep sleep mode. The two modes have similar transition sequences but different register settings. For 1.8V digital core, it's still provided with the working power by 1.8V LDO in suspend mode; while in deep sleep mode, the 1.8V LDO will be turned off, and the digital core is powered down.

In suspend mode, the RF transceiver is powered down, and the clock of the MCU block is stopped. It only takes about 400us for the ST17H30Q to enter the active mode from suspend mode.

While in deep sleep mode, both the RF transceiver and the MCU block are



powered down with only power management block being active. The transition time needed from deep sleep mode to active mode is 1ms, almost the same as power-up time.

3.1.3.2 Register configuration of power-saving mode

For the ST17H30Q, power-saving mode related registers are configurable via digital core and 3.3V analog registers.

Table 3- 1 Registers in digital core

Address	Mnemonic	Type	Description	Reset value
0x6e	WAKEUPEN	R/W	Wakeup enable [0]: enable i2c wakeup when transaction [1]: enable QDEC wakeup [2]: rsvd [3]: enable wakeup from gpio [4]: enable i2c wakeup when slave ID matched System resume control [5]: enable GPIO remote wakeup [6]: rsvd [7] sleep wakeup reset system enable	00
0x6f	PWDNEN	W	[0]: suspend enable [5]: rst all (act as power on reset) [6]: mcu low power mode [7]: stall mcu trig If bit[0] set 1, then system will go to suspend. Or only stall mcu	

Address 0x6e serves to enable various wakeup sources from power-saving mode.

Please refer to **Section 3.1.3.3**Wakeup source for details.

Table 3- 2 3.3V analog registers (afe3V_reg05 ~ afe3V_reg06) (bit)

Address(bit)	Mnemonic	Reset value	Description
afe3V_reg05<0>	32K_rc_pd	0	Power down 32KHz RC oscillator 1: Power down 32KHz RC oscillator 0: Power up 32KHz RC oscillator



Address(bit)	Mnemonic	Reset value	Description
afe3V_reg05<1>	reserved	0	
afe3V_reg05<2>	32M_rc_pd	0	Power down of 32MHz RC oscillator 1: Power down 32MHz RC oscillator 0: Power up 32MHz RC oscillator
afe3V_reg05<3>	xtal_LDO_pd	0	Power down of 16MHz crystal oscillator 1: Power down 0: Power up
afe3V_reg05<4>	ldo_ana_pd	0	Power down of analog LDO 1: Power down 0: Power up
afe3V_reg05<5>	reserved	1	
afe3V_reg05<6>	reserved	1	
afe3V_reg05<7>	BBPLL_LDO_pd_3V	0	Power down baseband pll LDO 1: Power down 0: Power up
afe3V_reg06<0>	comp_pd	1	Power down SAR ADC 1: Power down 0: Power up
afe3V_reg06<1>	rx_lnaLDO_pd	1	Power down LNA LDO in RF transceiver 1: Power down 0: Power up
afe3V_reg06<2>	rx_anaLDO_pd	1	Power down analog LDO in RF transceiver 1: Power down 0: Power up
afe3V_reg06<3>	rx_rflDO_pd	1	Power down RF LDO in RF transceiver 1: Power down 0: Power up
afe3V_reg06<4>	pll_BG_pd	1	Power down Bandgap in PLL 1: Power down 0: Power up
afe3V_reg06<5>	reserved		
afe3V_reg06<6>	pll_vco_ldo_pd	1	Power down VCO LDO 1: Power down 0: Power up
afe3V_reg06<7>	pll_cp_ldo_pd	1	Power down cp and prescaler anaog circuit ldo 1: Power down 0: power up



Table 3- 3 3.3V analog registers (3v_reg12 ~ 3v_reg45)

	Addr	Name	Description
r12	0x0c	buffer	this buffer will be reset when watch dog reset or whole chip reset(address 0x6f write 0x20)
r13	0x0d	buffer	this buffer will be reset when watch dog reset or whole chip reset(address 0x6f write 0x20)
r14	0x0e	buffer	this buffer will be reset when watch dog reset or whole chip reset(address 0x6f write 0x20)
r15	0x0f	32ktimer_cnt[7:0]	32ktimer cnt[0] = 1 means 4 cycles of 32k
r16	0x10	32ktimer_cnt[15:8]	
r17	0x11	32ktimer_cnt[23:16]	
r18	0x12[0]	32ktimer_cnt[24]	
	0x12[1]	32k timer enable	32k timer enable
r19	0x13[6:0]	r_dly	[6:0]wakeup or power on delay for digital LDO is ready.
	0x13[7]	rsvd	
r20	0x14[2:0]	wd_v	32k watch dog value
	0x14[3]	wd_en	32k watch dog enable
	0x14[7:4]	pad_pol[3:0]	pad polarity, one bit control two pad wakeup polarity. pad_pol[4] control pad_wakeup_en[1:0].
r21	0x15[3:0]	xtl_quick	xtl quick settle 0xf means disable
	0x15[5:4]	wd_wkup_src	watch dog wake up source select[4]; dig wakeup source enable watch dog.[5],pad wakeup source enable watch dog
	0x15[7:6]	rsvd	
r22	0x16	pad_wakeup_en	[7:0]-->p_gpio[24:17].[0]-->p_gpio[17]
r23	0x17[2:0]	wakeup_en	[0]-> digital wakeup enable[1]-->32k timer wakeup enable,[2] pad wake up enable
	0x17[3]	32k timer reset	
	0x17[4]	rsvd	
	0x17[5]	32k timer clock select	0:32k osc, 1 16M xtl
	0x17[6]	rsvd	
	0x17[7]	rsvd	
r24	0x18[0]	pwn_auto_en	auto pd 32k osc enable
	0x18[1]	rsvd	
	0x18[2]	pwn_auto_en	auto pd 16m xtal enable
	0x18[3]	pwn_auto_en	auto pd ldo_ana,BBPLL_ldo,sar_adc,rx_lnaLDO, rx_anan_ldo,rx_rFLDO,pll_bg, pll_vco_ldo,pll_cp_ldo
	0x18[4]	pwn_en	power down sequence enable



	Addr	Name	Description
	0x18[5]	pd_llkldo	pd low leakage ldo
	0x18[6]	pd_ldo_en	pd digital ldo enable
	0x18[7]	iso_en	isolation enable
r25	0x19	buffer	this buffer will be reset only at power on
r26	0x1a	buffer	this buffer will be reset only at power on
r27	0x1b	buffer	this buffer will be reset only at power on
r28	0x1c	buffer	this buffer will be reset only at power on
	0x1d~0x1f	rsvd	
r32	0x20	read only	32k timer_cnt[7:0](1 cycle of 32k clock will change the result)
r33	0x21	read only	32k timer_cnt[15:8]
r34	0x22	read only	32k timer_cnt[23:16]
	0x23[0]	rsvd	
	0x23[1]	w/r	write 1 to clean timer wakeup status.
	0x23[2]	w/r	write 1 to clean digital wakeup status
	0x23[3]	w/r	write 1 to clean pad wakeup status
r35	0x23[4]	wd_status	write 1 to clean watch dog status.
	0x23[5]	read only	rsvd
	0x23[6]	read only	32k timer_cnt[24]
	0x23[7]	w/r	32k timer enable toggle signal, write 1 to enable 32k timer
	0x24[0]	trk32m manul en	
	0x24[1]	trk32m en	
	0x24[2]	trk32k manul en	
	0x24[3]	trk32k en	
r36	0x24[4]	mode_12m	1, 12M xtal, 0: 16M xtal
	0x24[7:3]	rsvd	
r37	0x25	trk32m_m_cap	
r38	0x26[6:0]	trk32k_m_cap	
	0x26[7]	rsvd	
r39	0x27	rsvd	
r40	0x28		
r41	0x29		
r42	0x2a		
	0x2b[2:0]	pad_wakeup en[10:8]	[0]->p_gpio[26],[1]->p_gpio[27],[2]->p_gpio[31]
r43	0x2b[3]	rsvd	
	0x2b[6:4]	pad_pol[6:4]	pad_pol[6:4]^pad_wakeup_en[10:8]
r44		32M rc cap value	32M calibration read only
r45		32k rc cap value	32k calibration read only



3.1.3.3 Wakeup source

3.1.3.3.1 Wakeup source – GPIO

This wakeup source can only wake up the system from suspend mode.

First, set the right polarity of IO via the “Polarity” register (0x584, 0x58c, 0x594, 0x59c, 0x5a4). Polarity 1 indicates corresponding IO is active low, while 0 indicates corresponding IO is active high.

Second, set the right mask via the “Irq” register (0x587, 0x58f, 0x597, 0x59f, 0x5a7). 1: enable this IO as wakeup source; 0: disable this IO.

Third, set both the digital core address 0x6e bit[3] and 3v_reg23 bit[0] to 1 so as to activate this mode.

Please refer to **Section 8.1** GPIO for details about polarity and mask registers of each GPIO.

3.1.3.3.2 Wakeup source – QDEC

This wakeup source can only wake up the system from suspend mode.

First, digital core address 0x6e[1] should be set to 1b'1.

Second, address 3V_reg23 bit[0] should be set to 1b'1.

Third, addresses afe3V_reg05<0> and 3V_reg24 [0] should be cleared to power up 32K RC clock, then write 0x64[7] and 0x65[0] to 1.

After this wakeup source is enabled, once there's wheel rolling, square waves output are generated and the system is wakened.

3.1.3.3.3 Wakeup source – 32K timer

This wakeup source is able to wake up the system from suspend mode or deep sleep mode.

Address 3V_reg23 bit[1] is the enabling bit for wakeup source from 32k timer.

3.1.3.3.4 Wakeup source – pad

This wakeup source is able to wake up the system from suspend mode or deep sleep mode.

3v_reg23[2] should be set to 1b'1 to enable pad wakeup source.



3v_reg22 and 3v_reg43[2:0] are enabling signal for pad wakeup sources: 3v_reg22 bit[7:0] -> [GP24~GP17]; 3v_reg43 bit[2:0] -> [GP31, GP27, GP26]. 1: enable this IO as wakeup source; 0: disable this IO.

Polarity is controlled by 3v_reg20[7:4] and 3v_reg43[6:4]: 3v_reg43[6] controls polarity of GP31, bit[5] controls polarity of GP27, bit[4] controls polarity of GP26; 3v_reg20 bit[4] controls polarity of GP17 and GP18, bit[5] controls polarity of GP19 and GP20, bit[6] controls polarity of GP21 and GP22, bit[7] controls polarity of GP23 and GP24. Polarity 1 indicates corresponding IO is active low, while 0 indicates corresponding IO is active high.

3.1.3.4 Transition sequence

First, enable the target wakeup source, and disable other wakeup sources.

NOTE: In deep sleep mode, the wakeup_dig (including wakeup source-QDEC and wakeup source-GPIO, shown as Figure 3-3) can't be selected as wakeup source; the effective wakeup source is 32K timer or pad wakeup source.

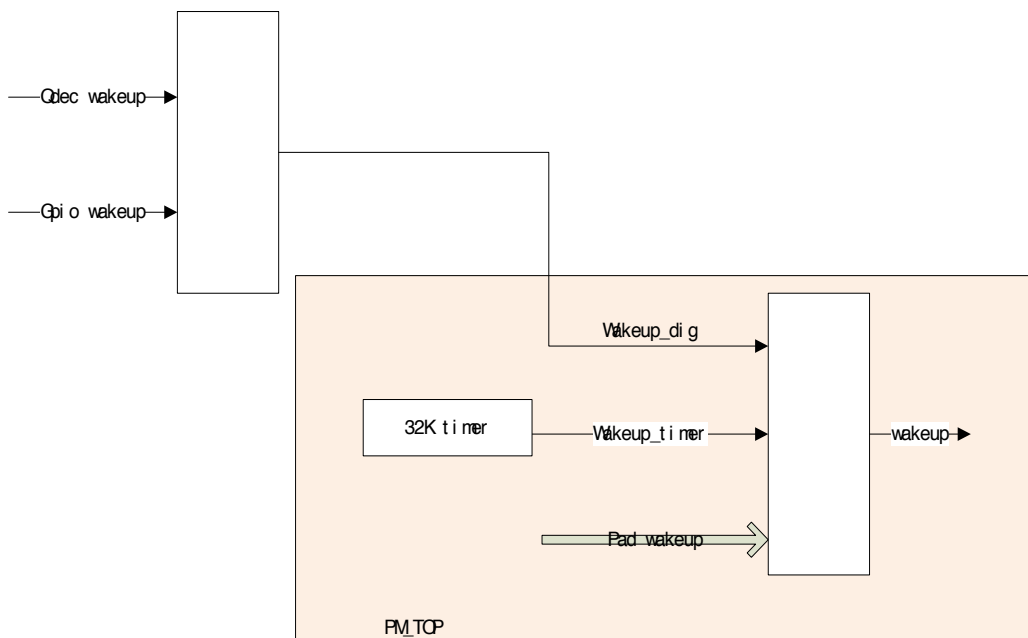


Figure 3- 3 Wakeup source

Second, select right power-saving mode: deep sleep mode or suspend mode. If deep sleep mode is to be selected, r24 bit[7] and bit[5] should be set to 1; r24 bit[7]



and bit[5] should be cleared if suspend mode is to be selected.

Third, configure other enabling bits: set r23 bit[7] to 1; set r24 bits [3:0] to 1111, and also set r24 bit[6] to 1.

Fourth, Write data 0x81 to digital core address 0x6f to trigger the whole system. The system enters deep sleep mode or suspend mode (power-saving status depends on the setting of r24).

3.2 Reset

Except for power on reset, it is also feasible to carry out software reset for the whole chip or some modules. Setting address 0x6f[5] to 1b'1 is to reset the whole chip. Addresses 0x60~0x62 serve to reset individual modules: if some bit is set to logic "1", the corresponding module is reset.

Table 3- 4 Register configuration for reset, wakeup and power down enabling

Address	Mnemonic	Type	Description	Reset Value
0x60	RST0	R/W	Reset control, 1 for reset, 0 for clear [0]: mcu [1]: zb [2]: rsvd [3]: dma [4]: algm [5]: sws [6]: aif [7]: rsvd	00
0x61	RST1	R/W	[0] rsvd [1]i2c [2]rsvd [3]pwm [4]rsvd [5]rsvd [6]mspi [7]bbpll	df
0x62	RST2	R/W	[0]adc [1]algs [2]mcic	00



Address	Mnemonic	Type	Description	Reset Value
			[3]mcic auto reset at suspend [4]systimer [5]rsvd [6]rsvd [7]rsvd	
0x6f	PWDNEN	W	[0] suspend enable [5]:rst all (act as power on reset) [6]:mcu low power mode [7]: stall mcu trig If bit[0] set 1, then system will go to suspend. Or only stall mcu	

4 2.4G RF Transceiver

4.1 Block diagram

The ST17H30Q integrates advanced BLE/2.4GHz RF transceiver. The RF transceiver works in the worldwide 2.4GHz ISM (Industrial Scientific Medical) band and contains an integrated balun with a single-ended RF Tx/Rx port pin. No matching components are needed.

The transceiver consists of a fully integrated frequency synthesizer, a power amplifier, a modulator and a receiver. The transceiver works in standard-compliant BLE mode which supports FSK/GFSK modulations.

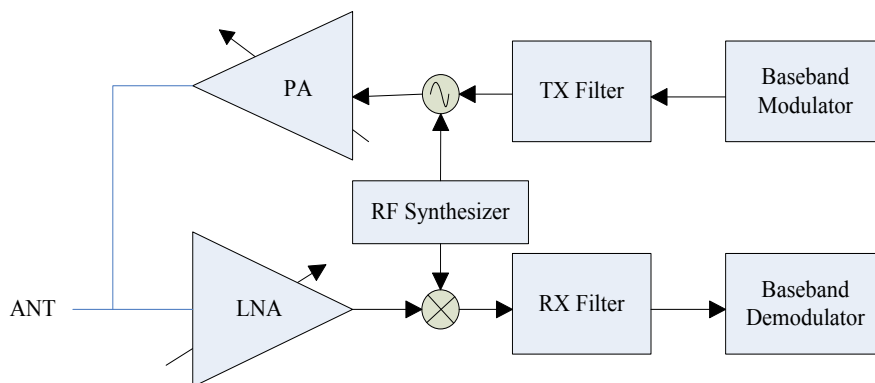


Figure 4- 1 Block diagram of RF transceiver

The internal PA can deliver a maximum 6dBm output power, avoiding the needs for an external RF PA.



4.2 Function description

Air interface data rate, the modulated signaling rate for RF transceiver when transmitting and receiving data, supports 1Mbps mode for the ST17H30Q.

For the ST17H30Q, RF transceiver can operate with frequency ranging from 2.400GHz to 2.4835GHz. The RF channel frequency setting determines the center of the channel.

4.3 Baseband

The baseband contains dedicated hardware logic to perform fast AGC control, access code correlation, CRC checking, data whitening, encryption/decryption and frequency hopping logic.

The baseband supports all features required by Bluetooth v4.0 specification.

4.3.1 Packet format

Packet format is shown as Table 4-1:

Table 4- 1 Packet Format

LSB		MSB	
Preamble (1 octet)	Access Address (4 octets)	PDU (2 to 39 octets)	CRC (3 octets)

Packet length 80bit ~ 376bit (80~376us @ 1Mbps).

4.3.2 RSSI

The ST17H30Q provides accurate RSSI (Receiver Signal Strength Indicator) indication which can be read on per packet basis.

5 Clock



5.1 System clock

5.1.1 System clock sources

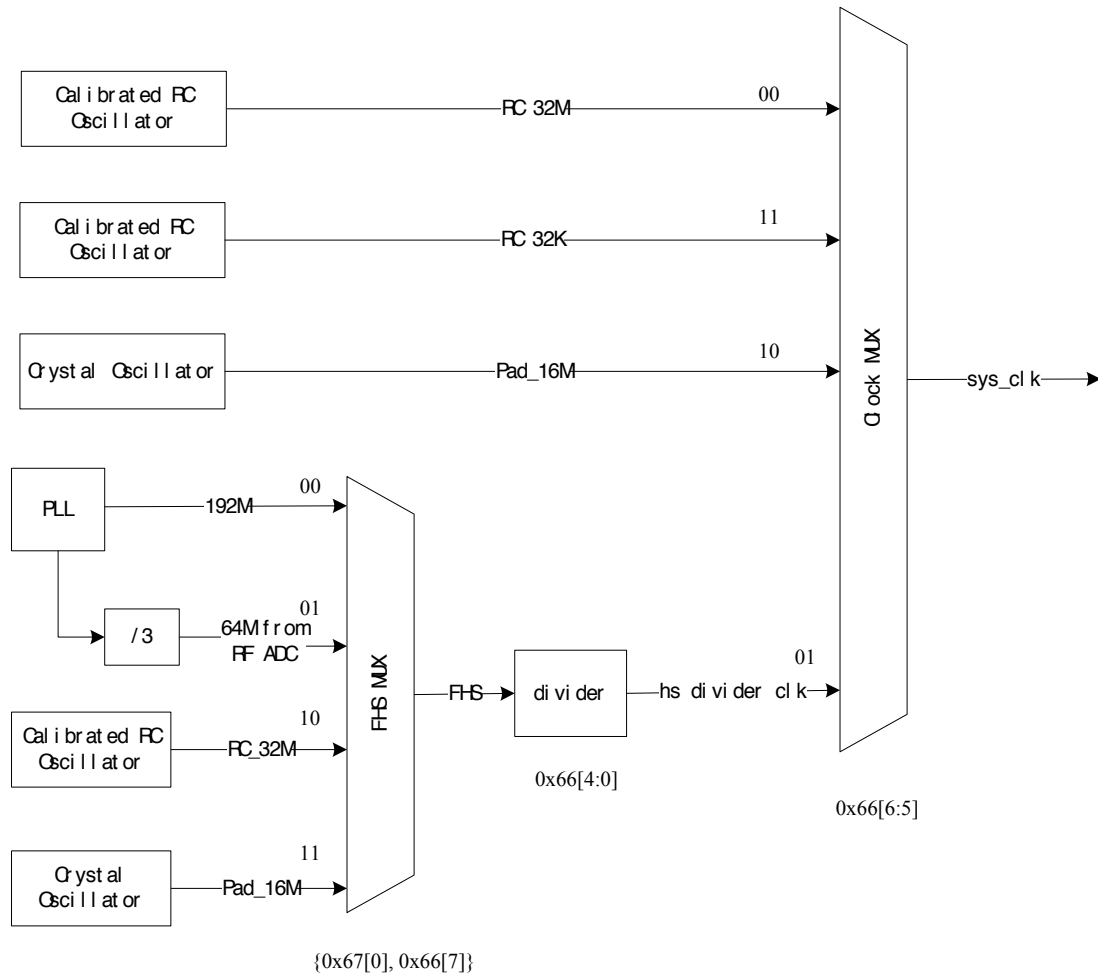


Figure 5- 1 Block diagram of system clock

There are four selectable clock sources for system clock, including: 32MHz RC oscillator, hs divider clock, 16MHz pad clock (external crystal oscillator) and 32KHz RC oscillator. Register CLKSEL (address 0x66[6:5]) is used to select system clock source.

Commonly a 16MHz crystal oscillator can be employed to generate a basic clock signal for the system. The maximum frequency tolerance of the crystal is ± 60 ppm. And a low-power RC oscillator can be used to generate a 32KHz clock signal for the wakeup timer.



5.1.2 FHS select

The high speed clock (FHS) is selectable via address {0x67[0], 0x66[7]} from the following sources: 192MHz clock from PLL, 64MHz clock from RF ADC, 32MHz clock from RC oscillator or 16MHz pad clock (external crystal oscillator).

5.1.3 HS divider clock

If address 0x66[6:5] is set to 2b'01 to select the HS divider clock as system clock source, system clock frequency is adjustable via address 0x66[4:0]. $F_{\text{System clock}} = F_{\text{FHS}} / (\text{system clock divider value in address } 0x66[4:0] + 1)$.

5.2 Module clock

Registers CLKEN0~CLKEN2 (address 0x63~0x65) are used to enable or disable clock for various modules. By disable the clocks of unused modules, current consumption could be reduced.

5.2.1 SAR ADC clock

ADC clock derives from FHS. Address 0x6b[7] should be set to 1b'1 to enable ADC clock.

ADC clock frequency dividing factor contains step and mod.

Addresses 0x6b[6:4] and 0x69[7:0] serve to configure ADC_step[10:0].

Addresses 0x6b[3:0] and 0x6a[7:0] serve to configure ADC_mod[11:0].

ADC clock is calculated according to the formula below:

$$F_{\text{ADC clock}} = F_{\text{FHS}} * \text{adc_step}[10:0] / \text{adc_mod}[11:0]$$

5.3 Register table

Table 5- 1 Register table for clock

Address	Mnemonic	Type	Description	Reset Value
0x63	CLKEN0	R/W	Clock enable control: 1 for enable; 0 for disable [0] : mcu	8c



Address	Mnemonic	Type	Description	Reset Value
			[1] : zb [2]: rsvd [3]: dma [4]: algm [5]: sws [6]: aif [7]: rsvd	
0x64	CLKEN1	R/W	[0]rsvd [1]i2c [2]rsvd [3]pwm [4]rsvd [5]rsvd [6]sys timer [7]qdec sysclk	00
0x65	CLKEN2	R/W	[0]32k for qdec [1]rsvd [2]rsvd [3]rsvd [4]rsvd [5]rsvd [6]rsvd [7]rsvd	00
0x66	CLKSEL	R/W	System clock select [4:0]: system clock divider: fhs/((CLKSEL[4:0]+1)). Fhs refer to {0x67[0], 0x66[7]} FHS_sel [6:5] 2'b00:32m clock from rc 2'b01:hs divider clk 2'b10:16M clock from pad 2'b11:32k clk from rc [7] FHS sel (see 0x67 definition)	ff
0x67	FHS_sel	R/W	{0x67[0],0x66[7]} fhs select 2'b00: 192M clock from pll 2'b01:64M 2'b10:32M clock from osc 2'b11:16M clock from pad	00
0x68	rsvd	R/W		
0x69	Adc step[7:0]	R/W	adc_step[7:0]	00
0x6a	Adc mod[7:0]	R/W	adc_mod[7:0]	2
0x6b	adcmodstep	R/W	[3:0] adc_mod[11:8]	00



Address	Mnemonic	Type	Description	Reset Value
			[7:4] adc_step[11:8], adc_step[11] is enable bit. adc_clk = clk_hs *adc_step[10:0] / adc_mod[11:0]	
0x6c	DMIC_step	R/W	rsvd	1
0x6d	DMIC_mod	R/W	rsvd	2

6 Timers

6.1 Timer0~Timer2

The ST17H30Q supports three general 32-bit timers including Timer0~ Timer2 in active mode.

Timer0 and Timer1 support four modes: Mode 0 (System Clock Mode), Mode 1 (GPIO Trigger Mode), Mode 2 (GPIO Pulse Width Mode) and Mode 3 (Tick Mode).

Timer2 only supports Mode0 and Mode3. Generally Timer 2 is configured as “watchdog” to monitor firmware running.

6.1.1 Register table

Table 6- 1 Register configuration for Timer0~Timer2

Address	Mnemonic	Type	Description	Reset Value
0x620	TMR_CTRL0	RW	[0]Timer0 enable [2:1] Timer0 mode. 0 using sclk, 1, using gpio, 2 count width of gpi, 3 tick [3]Timer1 enable [5:4] Timer1 mode. [6]Timer2 enable [7]Bit of timer2 mode	00
0x621	TMR_CTRL1	RW	[0]Bit of timer2 mode	00



Address	Mnemonic	Type	Description	Reset Value
			[7:1]Low bits of watch dog capture	
0x622	TMR_CTRL2	RW	[6:0]High bits of watch dog capture. It is compared with [31:18] of timer2 ticker [7]watch dog capture	00
0x623	TMR_STATUS	RW	[0] timer0 status, write 1 to clear [1] timer1 status, write 1 to clear [2] timer2 status, write 1 to clear [3] watch dog status, write 1 to clear	
0x624	TMR_CAPT0_0	RW	Byte 0 of timer0 capture	00
0x625	TMR_CAPT0_1	RW	Byte 1 of timer0 capture	00
0x626	TMR_CAPT0_2	RW	Byte 2 of timer0 capture	00
0x627	TMR_CAPT0_3	RW	Byte 3 of timer0 capture	00
0x628	TMR_CAPT1_0	RW	Byte 0 of timer1 capture	00
0x629	TMR_CAPT1_1	RW	Byte 1 of timer1 capture	00
0x62a	TMR_CAPT1_2	RW	Byte 2 of timer1 capture	00
0x62b	TMR_CAPT1_3	RW	Byte 3 of timer1 capture	00
0x62c	TMR_CAPT2_0	RW	Byte 0 of timer2 capture	00
0x62d	TMR_CAPT2_1	RW	Byte 1 of timer2 capture	00
0x62e	TMR_CAPT2_2	RW	Byte 2 of timer2 capture	00
0x62f	TMR_CAPT2_3	RW	Byte 3 of timer2 capture	00
0x630	TMR_TICK0_0	RW	Byte 0 of timer0 ticker	
0x631	TMR_TICK0_1	RW	Byte 1 of timer0 ticker	
0x632	TMR_TICK0_2	RW	Byte 2 of timer0 ticker	
0x633	TMR_TICK0_3	RW	Byte 3 of timer0 ticker	
0x634	TMR_TICK1_0	RW	Byte 0 of timer1 ticker	
0x635	TMR_TICK1_1	RW	Byte 1 of timer1 ticker	
0x636	TMR_TICK1_2	RW	Byte 2 of timer1 ticker	
0x637	TMR_TICK1_3	RW	Byte 3 of timer1 ticker	



Address	Mnemonic	Type	Description	Reset Value
0x638	TMR_TICK2_0	RW	Byte 0 of timer2 ticker	
0x639	TMR_TICK2_1	RW	Byte 1 of timer2 ticker	
0x63a	TMR_TICK2_2	RW	Byte 2 of timer2 ticker	
0x63b	TMR_TICK2_3	RW	Byte 3 of timer2 ticker	

6.1.2 Mode0 (System Clock Mode)

In Mode 0, system clock is employed as clock source.

After Timer is enabled, Timer Tick (i.e. counting value) is increased by 1 on each positive edge of system clock from preset initial Tick value. Generally the initial Tick value is set to 0.

Once current Timer Tick value matches the preset Timer Capture (i.e. timing value), an interrupt is generated, Timer stops counting and Timer status is updated.

Steps of setting Timer0 for Mode 0 is taken as an example.

1st: Set initial Tick value of Timer0

Set Initial value of Tick via registers TMR_TICK0_0~TMR_TICK0_3 (address 0x630~0x633). Address 0x630 is lowest byte and 0x633 is highest byte. It's recommended to clear initial Timer Tick value to 0.

2nd: Set Capture value of Timer0

Set registers TMR_CAPT0_0~TMR_CAPT0_3 (address 0x624~0x627). Address 0x624 is lowest byte and 0x627 is highest byte.

3rd: Set Timer0 to Mode 0 and enable Timer0

Set register TMR_CTRL0 (address 0x620) [2:1] to 2b'00 to select Mode 0; Meanwhile set address 0x620[0] to 1b'1 to enable Timer0. Timer0 starts counting upward, and Tick value is increased by 1 on each positive edge of system clock until it reaches Timer0 Capture value.



6.1.3 Mode1 (GPIO Trigger Mode)

In Mode 1, GPIO is employed as clock source. The “m0”/“m1” register specifies the GPIO which generates counting signal for Timer0/Timer1.

After Timer is enabled, Timer Tick (i.e. counting value) is increased by 1 on each positive/negative edge of GPIO from preset initial Tick value. Generally the initial Tick value is set to 0. The “Polarity” register specifies the GPIO edge when Timer Tick counting increases.

Note: Refer to **Section 8.1.2** for corresponding “m0”, “m1” and “Polarity” register address.

Once current Timer Tick value matches the preset Timer Capture (i.e. timing value), an interrupt is generated and timer stops counting.

Steps of setting Timer1 for Mode 1 is taken as an example.

1st: Set initial Tick value of Timer1

Set Initial value of Tick via registers TMR_TICK1_0~TMR_TICK1_3 (address 0x634~0x637). Address 0x634 is lowest byte and 0x637 is highest byte. It's recommended to clear initial Timer Tick value to 0.

2nd: Set Capture value of Timer1

Set registers TMR_CAPT1_0~TMR_CAPT1_3 (address 0x628~0x62b). Address 0x628 is lowest byte and 0x62b is highest byte.

3rd: Select GPIO source and edge for Timer1

Select certain GPIO to be the clock source via setting “m1” register.

Select positive edge or negative edge of GPIO input to trigger Timer1 Tick increment via setting “Polarity” register.

4th: Set Timer1 to Mode 1 and enable Timer1

Set address 0x620[5:4] to 2b'01 to select Mode 1; Meanwhile set address 0x620[3] to 1b'1 to enable Timer1. Timer1 starts counting upward, and Timer1 Tick value is increased by 1 on each positive/negative (specified during the 3rd step) edge of GPIO until it reaches Timer1 Capture value.



6.1.4 Mode2 (GPIO Pulse Width Mode)

In Mode 2, system clock is employed as the unit to measure the width of GPIO pulse. The “m0”/“m1” register specifies the GPIO which generates control signal for Timer0/Timer1.

After Timer is enabled, Timer Tick is triggered by a positive/negative (configurable) edge of GPIO pulse. Then Timer Tick (i.e. counting value) is increased by 1 on each positive edge of system clock from preset initial Tick value. Generally the initial Tick value is set to 0. The “Polarity” register specifies the GPIO edge when Timer Tick starts counting.

Note: Refer to **Section 8.1.2** for corresponding “m0”, “m1” and “Polarity” register address.

While a negative/positive edge of GPIO pulse is detected, an interrupt is generated and timer stops counting. The GPIO pulse width could be calculated in terms of tick count and period of system clock.

Steps of setting Timer0 for Mode 2 is taken as an example.

1st: Set initial Timer0 Tick value

Set Initial value of Tick via registers TMR_TICK0_0~TMR_TICK0_3 (address 0x630~0x633). Address 0x630 is lowest byte and 0x633 is highest byte. It's recommended to clear initial Timer Tick value to 0.

2nd: Select GPIO source and edge for Timer0

Select certain GPIO to be the clock source via setting “m0” register.

Select positive edge or negative edge of GPIO input to trigger Timer0 counting start via setting “Polarity” register.

3rd: Set Timer0 to Mode 2 and enable Timer0

Set address 0x620[2:1] to 2b'10 to select Mode 2; Meanwhile set address 0x620 [0] to 1b'1 to enable Timer0.

Timer0 Tick is triggered by a positive/negative (specified during the 2nd step) edge of GPIO pulse. Timer0 starts counting upward and Timer0 Tick value is increased by 1 on each positive edge of system clock.

While a negative/positive edge of GPIO pulse is detected, an interrupt is



generated and Timer0 tick stops.

4th: Read current Timer0 Tick value to calculate GPIO pulse width

Read current Timer0 Tick value from address 0x630~0x633.

Then GPIO pulse width is calculated as follows:

GPIO pulse width

$$= \text{System clock period} * (\text{current Timer0 Tick} - \text{initial Timer0 Tick})$$

For initial Timer0 Tick value set to the recommended value of 0, then:

$$\text{GPIO pulse width} = \text{System clock period} * \text{current Timer0 Tick}.$$

6.1.5 Mode3 (Tick Mode)

In Mode 3, system clock is employed.

After Timer is enabled, Timer Tick starts counting upward, and Timer Tick value is increased by 1 on each positive edge of system clock.

This mode could be used as time indicator. There will be no interrupt generated. Timer Tick keeps rolling from 0 to 0xffffffff. When Timer tick overflows, it returns to 0 and starts counting upward again.

Steps of setting Timer0 for Mode 3 is taken as an example.

1st: Set initial Tick value of Timer0

Set Initial value of Tick via address 0x630~0x633. Address 0x630 is lowest byte and address 0x633 is highest byte. It's recommended to clear initial Timer Tick value to 0.

2nd: Set Timer0 to Mode 3 and enable Timer0

Set address 0x620[2:1] to 2b'11 to select Mode 3, meanwhile set address 0x620[0] to 1b'1 to enable Timer0. Timer0 Tick starts to roll.

3rd: Read current Timer0 Tick value

Current Timer0 Tick value can be read from address 0x630~0x633.

6.1.6 Watchdog

Programmable watchdog could reset chip from unexpected hang up or malfunction.



Only Timer2 supports Watchdog.

Timer2 Tick has 32bits. Watchdog Capture has only 14bits, which consists of TMR_CTRL2 (address 0x622) [6:0] as higher bits and TMR_CTRL1 (address 0x621) [7:1] as lower bits. Chip will be reset when the Timer2 Tick[31:18] matches Watch dog capture.

1st: Clear Timer2 Tick value

Clear registers TMR_TICK2_0 ~TMR_TICK2_3 (address 0x638~0x63b). Address 0x638 is lowest byte and 0x63b is highest byte.

2nd: Enable Timer2

Set register TMR_CTRL0 (address 0x620) [6] to 1b'1 to enable Timer2.

3rd: Set 14-bit Watchdog Capture value and enable Watchdog

Set address 0x622[6:0] as higher bits of watchdog capture and 0x621[7:1] as lower bits. Meanwhile set address 0x622[7] to 1b'1 to enable Watchdog.

Then Timer2 Tick starts counting upwards from 0.

If bits[31:18] of Timer2 Tick value read from address 0x638~0x63b reaches watchdog capture, the chip will be reset.

6.2 32K LTIMER

The ST17H30Q supports a low frequency (32KHz) LTIMER in suspend mode or deep sleep mode. This timer can be used as one kind of wakeup source.

Analog register 3V_reg35[7] should be set to 1b'1 to enable the LTIMER.

3V_reg16~3V_reg18[6:0] serve to configure timing value for the LTIMER with the unit of ms.

3V_reg18[7] serves to select mode for the LTIMER: continuous mode, or single mode. In continuous mode, when the LTIMER expires, the timing value is automatically reloaded, the counting value returns to zero and starts counting upwards again. In single mode, when the LTIEMR expires, it stops counting.

3V_reg23[5] serves to select clock source for the LTIMER: 32K RC oscillator, or 16M Pad clock.

Current counting value can be read from 3V_reg32~3V_reg34 and 3V_reg35[6].



Table 6- 2 3.3V analog register table for LTIMER

Addr (Decimal)	Addr (Hexadecimal)	Name	Description	Default value
r16	0x10	32ktimer_cnt[7:0]	32ktimer cnt[0] = 1 means 4 cycles of 32k	
r17	0x11	32ktimer_cnt[15:8]		
r18	0x12[6:0]	32ktimer_cnt[22:16]		
	0x12[7]	32ktimer mode	32k timer mode,1: continuous mode, 0: single mode	
r23	0x17[2:0]	wakeup_en	[0]-> digital wakeup enable[1]->32k timer wakeup enable,[2] pad wake up enable	
	0x17[3]	32k timer reset		
	0x17[4]	rsvd		
	0x17[5]	32k timer clock select	0:32k osc, 1 16M xtl	
	0x17[6]	rsvd		
r23	0x17[7]	rsvd	power down sequence enable	
r32	0x20	read only	32k timer_cnt[7:0](1 cycle of 32k clock will change the result)	
r33	0x21	read only	32k timer_cnt[15:8]	
r34	0x22	read only	32k timer_cnt[23:16]	
r35	0x23[0]	rsvd		
	0x23[1]	w/r	write 1 to clean timer wakeup status.	
	0x23[2]	w/r	write 1 to clean digital wakeup status	
	0x23[3]	w/r	write 1 to clean pad wakeup status	
	0x23[4]	wd_status	write 1 to clean watch dog status.	
	0x23[5]	read only	rsvd	
	0x23[6]	read only	32k timer_cnt[24]	
	0x23[7]	w/r	32k timer enable toggle signal, write 1 to enable 32k timer	

6.3 System timer

The ST17H30Q also supports a System Timer.



Table 6- 3 Register table for System Timer

Address	Mnemonic	R/W	Function	Default Value
0x740	Sys_timer[7:0]	R/W		00
0x741	Sys_timer[15:8]	R/W		00
0x742	Sys_timer[23:16]	R/W		00
0x743	Sys_timer[31:24]	R/W	System timer counter, write to set initial value. This is the sys timer counter	00

7 Interrupt System

7.1 Interrupt structure

The interrupting function is applied to manage dynamic program sequencing based on real-time events triggered by timers, pins and etc.

For the ST17H30Q, there are 24 interrupt sources in all: 16 types are level-triggered interrupt sources and 8 types are edge-triggered interrupt sources.

When CPU receives an interrupt request (IRQ) from some interrupt source, it will decide whether to respond to the IRQ. If CPU decides to respond, it pauses current routine and starts to execute interrupt service subroutine. Program will jump to certain code address and execute IRQ commands. After finishing interrupt service subroutine, CPU returns to the breakpoint and continues to execute main function.

7.2 Register configuration

Table 7- 1 Register table for Interrupt system

Address	Mnemonic	Type	Description	Reset Value
0x640	MASK_0	RW	Byte 0 interrupt mask, level-triggered type {irq_host_cmd irq_qdec, rsvd, irq_pwm, irq_dma, rsvd, time2, time1, time0} [7]: irq_host_cmd irq_qdec [6]: rsvd [5]: irq_pwm [4]: irq_dma [3]: rsvd [2]: time2 [1]: time1 [0]: time0	00
0x641	MASK_1	RW	Byte 1 interrupt mask, level-triggered type	00



Address	Mnemonic	Type	Description	Reset Value
			{an_irq, irq_software, irq_zb, rsvd, rsvd, rsvd, rsvd, rsvd} [7]: an_irq [6]: irq_software [5]: irq_zb [4]: rsvd [3]: rsvd [2]: rsvd [1]: rsvd [0]: rsvd	
0x642	MASK_2	RW	Byte 2 interrupt mask, edge-triggered type {gpio2risc[0], rsvd, rsvd, rsvd, pm_irq, irq_gpio, rsvd, rsvd} [7]: gpio2risc[0] [6]: rsvd [5]: rsvd [4]: rsvd [3]: pm_irq [2]: irq_gpio [1]: rsvd [0]: rsvd	00
0x643	IRQMODE	RW	[0] interrupt enable [1] reserved (Multi-Address enable)	00
0x644	PRI0_0	RW	Byte 0 of priority 1: High priority; 0: Low priority	00
0x645	PRI0_1	RW	Byte 1 of priority	00
0x646	PRI0_2	RW	Byte 2 of priority	00
0x648	IRQSRC_0	R	Byte 0 of interrupt source	
0x649	IRQSRC_1	R	Byte 1 of interrupt source	
0x64a	IRQSRC_2	R	Byte 2 of interrupt source	

7.2.1 Enable/Mask interrupt sources

Various interrupt sources could be enabled or masked by registers MASK_0~MASK_2 (address 0x640~0x642).

7.2.2 Interrupt mode and priority

Interrupt mode is typically-used mode. Register IRQMODE (address 0x643)[0] should be set to 1b'1 to enable interrupt function.



IRQ tasks could be set as High or Low priority via registers PRIO_0~PRIO_2 (address 0x644~0x646). When more than one interrupt sources assert interrupt requests at the same time, CPU will respond depending on respective interrupt priority levels. It's recommended not to modify priority setting.

7.2.3 Interrupt source flag

Three bytes in registers IRQSRC_0~IRQSRC_2 (address 0x648~0x64a) serve to indicate IRQ sources. Once IRQ occurs from certain source, the corresponding IRQ source flag will be raised to "High". User could identify IRQ source by reading address 0x648~0x64a.

When handling edge-triggered type interrupt, the corresponding IRQ source flag needs to be cleared via address 0x64a. Take the interrupt source irq_gpio for example: First enable the interrupt source by setting address 0x642[2] to 1; then set address 0x643 [0] to 1 to enable the interrupt. In interrupt handling function, 24-bit data is read from address 0x648~0x64a to determine which IRQ source is valid; if data bit[18] is 1, it means the irq_gpio interrupt is valid. Clear this interrupt source by setting address 0x64a bit[2] to 1.

As for level-type interrupt, IRQ interrupt source status needs to be cleared via setting corresponding module status register. Take Timer0 IRQ interrupt source for example, register TMR_STATUS (address 0x623) [0] should be written with 1b'1 to clear Timer0 status (refer to **Section 6.1.1**).

8 Interface

8.1 GPIO

The ST17H30QET24 supports up to 14 GPIOs. Except for dedicated GPIOs, all digital IOs can be used as general purpose IOs. Please refer to **Section 1.6** for available GPIO resources.



8.1.1 Basic configuration

8.1.1.1 Multiplexed functions

Please refer to Table 8- 1 for various GPIO interface configuration.

Table 8- 1 GPIO lookup table 1 for the ST17H30QET24

Pin Name	Default Function	Priority0	Priority1	Priority2	Act as GPIO	Act as GPIO			Input Enable	DS (Drive Strength)
						OEN	Input	Output		
MCLK	MCLK				5a6[2]	5a2[2]	5a0[2]	5a3[2]	5a1[2]	5a5[2]
MSDO	MSDO				5a6[3]	5a2[3]	5a0[3]	5a3[3]	5a1[3]	5a5[3]
MSDI	MSDI				5a6[4]	5a2[4]	5a0[4]	5a3[4]	5a1[4]	5a5[4]
MSCN	MSCN				5a6[1]	5a2[1]	5a0[1]	5a3[1]	5a1[1]	5a5[1]
SWS	SWS				5a6[5]	5a2[5]	5a0[5]	5a3[5]	5a1[5]	5a5[5]
GP9/ pwm0	GPIO input				58e[1]	58a[1]	588[1]	58b[1]	589[1]	58d[1]
GP10/ pwm1	GPIO input				58e[2]	58a[2]	588[2]	58b[2]	589[2]	58d[2]
GP17/ pwm2_inv/ ANA0	GPIO input	pwm2_inv			596[1]	592[1]	590[1]	593[1]	591[1]	595[1]
GP18/ ANA1	GPIO input				NA	592[2]	590[2]	593[2]	591[2]	595[2]
GP22/ scl/ ANA2	GPIO input	scl			NA	592[6]	590[6]	593[6]	591[6]	595[6]
GP23/ sda/ ANA3	GPIO input	sda			596[7]	592[7]	590[7]	593[7]	591[7]	595[7]
GP30/ scl	GPIO input	scl			NA	59a[6]	598[6]	59b[6]	599[6]	59d[6]
GP31/ scl	GPIO input	sda			59e[7]	59a[7]	598[7]	59b[7]	599[7]	59d[7]



Pin Name	Default Function	Priority0	Priority1	Priority2	Act as GPIO	Act as GPIO			Input Enable	DS (Drive Strength)
						OEN	Input	Output		
sda	input									
GP5/ sda/ pwm2_inv/ pwm3	GPIO input	5d4[0] =1 sda (this function should be disabled)	5d4[1]=1 pwm3	pwm2_inv	586[5]	582[5]	580[5]	583[5]	581[5]	585[5]

***Notes:**

- (1) OEN: active low. 0: output enable.
- (2) Input Enable: active high. 1: input enable.
- (3) NA: no configuration.
- (4) Priority0 > Priority1 > Priority2.
- (5) For the ST17H30QET24, it's not recommended to use GP5 as I2C_SDA function.

The pins among GP0~GP32 (including GP5, GP9~GP10, GP17~GP18, GP22~GP23, GP30~GP31) are used as GPIO input function by default. For a pin with multiplexed function(s), to enable the function with lower priority, other function(s) with higher priority should be disabled first.

Take the **MCLK** as an example:

- (1) This pin acts as MCLK function by default.
- (2) To use the pin as GPIO function, address 0x5a6[2] should be set to 1b'1.

If the pin is used as output, its "OEN" register (address 0x5a2[2]) and "Input Enable" register (address 0x5a1[2]) should be cleared.

If the pin is used as input, its "OEN" register (address 0x5a2[2]) and "Input Enable" register (address 0x5a1[2]) should be set to 1b'1.

Take the **GP5/sda/pwm2_inv/pwm3** as another example:



- (1) This pin acts as GPIO input by default.
- (2) To use the pin as GPIO output, address 0x586[5] should be set to 1b'1, and addresses {0x582[5], 0x581[5]} should be cleared.
- (3) To use the pin as pwm3 function, addresses {0x586[5], 0x5d4[0]} should be cleared, and 0x5d4[1] should be set to 1b'1.
- (4) To use the pin as pwm2_inv function, addresses {0x586[5], 0x5d4[0], 0x5d4[1]} should be cleared.

8.1.1.2 Drive strength

The registers in the “DS” column are used to configure corresponding pin’s driving strength: “1” indicates maximum drive level, while “0” indicates minimal drive level. The “DS” configuration will take effect when the pin is used as output. It’s set as the strongest driving level by default. In actual applications, driving strength can be decreased to lower level if necessary.

As shown in Table 8- 2, all the GPIO pins support maximum drive level of 4mA (“DS”=1) and minimal drive level of 0.7mA (“DS”=0) with the following exceptions:

- ✧ MCLK, MSDO, MSDI and MSCN: maximum=4mA (“DS”=1), minimum=2mA (“DS”=0);
- ✧ SWS: maximum=8mA (“DS”=1), minimum=4mA (“DS”=0).

Table 8- 2 IO drive strength for ST17H30QET24

No.	Pin Name	Drive Strength	
		“DS”=0	“DS”=1
1	MSDO	2mA	4mA
2	MSDI	2mA	4mA
3	MSCN	2mA	4mA
4	SWS	4mA	8mA
5	GP9/pwm0 #	0.7mA	4mA
6	GP10/pwm1 #	0.7mA	4mA
11	GP17/pwm2_inv/ANA0 *	0.7mA	4mA
12	GP18/ANA1 *	0.7mA	4mA
13	GP22/scl/ANA2 *	0.7mA	4mA



No.	Pin Name	Drive Strength	
		“DS”=0	“DS”=1
14	GP23/sda/ANA3 *	0.7mA	4mA
18	GP30/scl	0.7mA	4mA
19	GP31/sda *	0.7mA	4mA
23	GP5/sda/pwm2_inv/ pwm3 #	0.7mA	4mA
24	MCLK	2mA	4mA

8.1.2 Connection relationship between GPIO and related modules

GPIO can be used to generate GPIO interrupt signal for interrupt system, counting or control signal for Timer/Counter module, or GPIO2RISC interrupt signal for interrupt system.

For the “Exclusive Or (XOR)” operation result for input signal from any GPIO pin and respective “polarity” value, on one hand, it takes “And” operation with “irq” and generates GPIO interrupt request signal; on the other hand, it takes “And” operation with “m0/m1”, and generates counting signal in Mode 1 or control signal in Mode 2 for Timer0/Timer1, or generates GPIO2RISC interrupt request signal.

GPIO interrupt request signal = | ((input ^ polarity) & irq);

Counting (Mode 1) or control (Mode 2) signal for Timer0 = | ((input ^ polarity) & m0);

Counting (Mode 1) or control (Mode 2) signal for Timer1 = | ((input ^ polarity) & m1);

GPIO2RISC[0] interrupt request signal = | ((input ^ polarity) & m0);

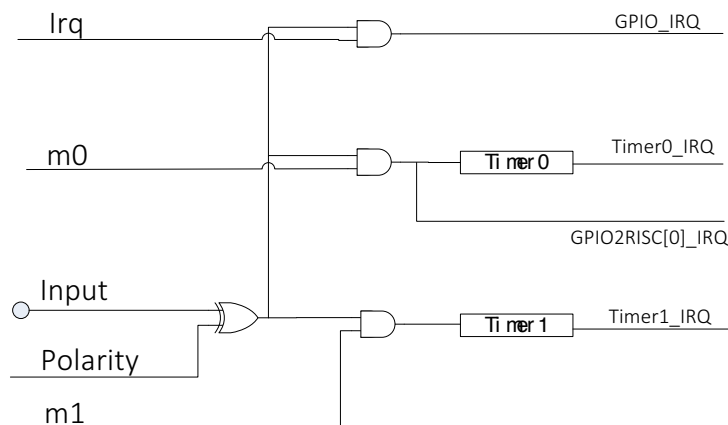




Figure 8- 1 Logic relationship between GPIO and related modules

Please refer to Table 8- 3 and Table 7- 1 to learn how to configure GPIO for interrupt system or Timer0/Timer1 (Mode 1 or Mode 2).

- (1) First enable GPIO function, IE and disable OEN.
- (2) GPIO IRQ signal: Select GPIO interrupt trigger edge (positive edge or negative edge) via configuring “Polarity” register, and set corresponding GPIO interrupt enabling bit “Irq” register. Finally enable GPIO interrupt (irq_gpio at address 0x642[2]).

User can read addresses {0x5c0 ~ 0x5c3, 0x5d0} to see which GPIO asserts GPIO interrupt request signal. **Note:** 0x5c0[5] --> GP5, 0x5c1[1] --> GP9, 0x5c1[2] --> GP10, 0x5c2[1] --> GP17, 0x5c2[2] --> GP18, 0x5c2[6] --> GP22, 0x5c2[7] --> GP23, 0x5c3[6] --> GP30, 0x5c3[7] --> GP31, 0x5d0[1] --> MSCN, 0x5d0[2] --> MCLK, 0x5d0[3] --> MSDO, 0x5d0[4] --> MSDI, 0x5d0[5] --> SWS.

- (3) Timer/Counter counting or control signal: Configure “Polarity” register (In Mode 1, it determines GPIO edge when Timer Tick counting increases; in Mode 2, it determines GPIO edge when Timer Tick starts counting) and set “m0/m1” register.

User can read addresses {0x5c4~0x5c7, 0x5d1}/{0x5c8~0x5cb, 0x5d2} to see which GPIO asserts counting signal (in Mode 1) or control signal (in Mode 2) for Timer0/Timer1. **Note: Timer0:** {0x5c4[5] --> GP5, 0x5c5[1] --> GP9, 0x5c5[2] --> GP10, 0x5c6[1] --> GP17, 0x5c6[2] --> GP18, 0x5c6[6] --> GP22, 0x5c6[7] --> GP23, 0x5c7[6] --> GP30, 0x5c7[7] --> GP31, 0x5d1[1] --> MSCN, 0x5d1[2] --> MCLK, 0x5d1[3] --> MSDO, 0x5d1[4] --> MSDI, 0x5d1[5] --> SWS} / **Timer1:** {0x5c8[5] --> GP5, 0x5c9[1] --> GP9, 0x5c9[2] --> GP10, 0x5ca[1] --> GP17, 0x5ca[2] --> GP18, 0x5ca[6] --> GP22, 0x5ca[7] --> GP23, 0x5cb[6] --> GP30, 0x5cb[7] --> GP31, 0x5d2[1] --> MSCN, 0x5d2[2] --> MCLK, 0x5d2[3] --> MSDO, 0x5d2[4] --> MSDI, 0x5d2[5] --> SWS}.

- (4) GPIO2RISC IRQ signal: Select GPIO2RISC interrupt trigger edge (positive edge or negative edge) via configuring “Polarity”, and set corresponding GPIO enabling bit “m0”. Enable GPIO2RISC[0] interrupt, i.e. “gpio2risc[0]” (address



0x642[7]).

User can read addresses {0x5c4~0x5c7, 0x5d1} to see which GPIO asserts GPIO2RISC[0] interrupt request signal. **Note:** {0x5c4[5] --> GP5, 0x5c5[1] --> GP9, 0x5c5[2] --> GP10, 0x5c6[1] --> GP17, 0x5c6[2] --> GP18, 0x5c6[6] --> GP22, 0x5c6[7] --> GP23, 0x5c7[6] --> GP30, 0x5c7[7] --> GP31, 0x5d1[1] --> MSCN, 0x5d1[2] --> MCLK, 0x5d1[3] --> MSDO, 0x5d1[4] --> MSDI, 0x5d1[5] --> SWS}.

Table 8- 3 GPIO lookup table 2 for the ST17H30QET24

Pin	Input (R)	Polarity 1: active low 0: active high	Irq	m0	m1
MCLK	5a0[2]	5a4[2]	5a7[2]	5ac[2]	5b4[2]
MSDO	5a0[3]	5a4[3]	5a7[3]	5ac[3]	5b4[3]
MSDI	5a0[4]	5a4[4]	5a7[4]	5ac[4]	5b4[4]
MSCN	5a0[1]	5a4[1]	5a7[1]	5ac[1]	5b4[1]
SWS	5a0[5]	5a4[5]	5a7[5]	5ac[5]	5b4[5]
GP9/pwm0	588[1]	58c[1]	58f[1]	5a9[1]	5b1[1]
GP10/pwm1	588[2]	58c[2]	58f[2]	5a9[2]	5b1[2]
GP17/ pwm2_inv/ ANA0	590[1]	594[1]	597[1]	5aa[1]	5b2[1]
GP18/ANA1	590[2]	594[2]	597[2]	5aa[2]	5b2[2]
GP22/ scl/ANA2	590[6]	594[6]	597[6]	5aa[6]	5b2[6]
GP23/ sda/ANA3	590[7]	594[7]	597[7]	5aa[7]	5b2[7]
GP30/scl	598[6]	59c[6]	59f[6]	5ab[6]	5b3[6]
GP31/sda	598[7]	59c[7]	59f[7]	5ab[7]	5b3[7]
GP5/ sda/	580[5]	584[5]	587[5]	5a8[5]	5b0[5]



Pin	Input (R)	Polarity 1: active low 0: active high	Irq	m0	m1
pwm2_inv/ pwm3					

8.2 I2C

The ST17H30Q embeds I2C hardware module, which could only act as Slave mode. I2C is a popular inter-IC interface requiring only 2 bus lines, a serial data line (SDA) and a serial clock line (SCL).

8.2.1 Pin configuration

Table 8- 4 shows I2C interface configuration and priority:

Table 8- 4 I2C pin configuration

a) ~586[5] & 5d4[0]	Reserved (GP4/GP5)
b) ~58e[5]	Reserved (GP12/GP13)
c) ~596[7]	GP22/GP23
d) ~59e[7]	GP30/GP31
Priority: a) > b) > c) > d)	

To use GP22 and GP23 of the ST17H30QET24 as I2C_SCL and I2C_SDA respectively, address 596[7] should be cleared, meanwhile GP5 should not be configured as I2C_SDA function.

It's noted that the I2C_SCL pin must be configured as "input" via setting the corresponding "Input Enable" register to 1b'1.

8.2.2 Lenze I2C communication protocol

Lenze I2C module supports standard mode (100kbps), Fast-mode (400kbps), Fast-mode plus (1Mbps) and High-speed mode (3.4Mbps) with restriction that system



clock must be by at least 10x of data rate.

Two wires, SDA and SCL carry information between Master device and Slave device connected to the bus. Each device is recognized by unique address. Master device is the device which initiates a data transfer on the bus and generates the clock signals to permit that transfer. Slave device is the device addressed by a master.

Both SDA and SCL are bidirectional lines connected to a positive supply voltage via a pull-up resistor. When the bus is free, both lines are HIGH. It's noted that data in SDA line must keep stable when clock signal in SCL line is at high level, and level state in SDA line is only allowed to change when clock signal in SCL line is at low level.

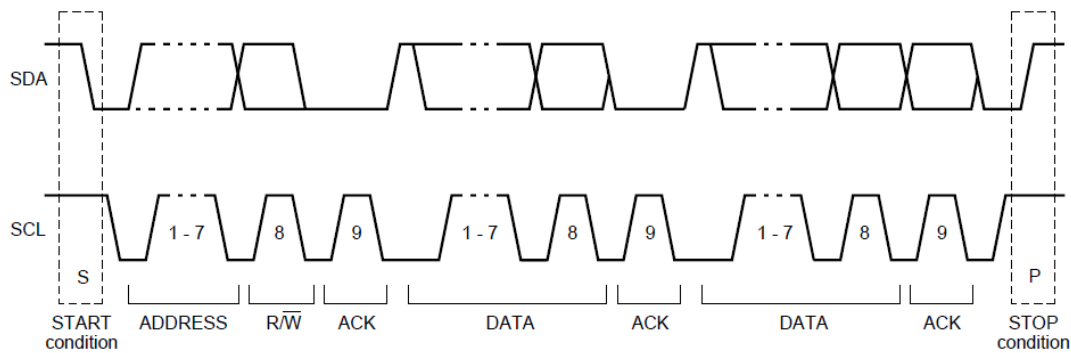


Figure 8- 2 I2C timing chart

8.2.3 Register table

Table 8- 5 Register table for I2C

Address	Name	R/W	Description	Reset Value
0x00	rsvd	RW		
0x01	I2CID	RW	I2C ID	0x5c
0x02	rsvd	RW		
0x03	I2CSCT	RW	[0]: address auto increase enable [1]: rsvd [2] enable host address	0x01
0x20	PCMD	RW	Command sent by host [6]: Host to device	



Address	Name	R/W	Description	Reset Value
			[7]: Device to host	
0x21	HOSTCS		W/r[0]:host_rd_clear_en: host read auto clear enable r/o[1]:host_cmd_rd:i2c host operation have happened and is read operation r/o[2]:host_cmd_wr:i2c host operation have happened and is write operation	0x01
0x22	irq		[0]: write 1 clear software_irq, read software irq status [1]: write 1 clear an_irq , read an_irq status [2]: write 1 clear host_pkt_irq, read host_pkt_irq status [3] rsvd [4] write 1 to trigger software irq	
0x3e	Reg_host_map_adrl	R/W	I2C mapping[7:0]: Lower byte of Mapping mode buffer address	0x80
0x3f	Reg_host_map_adrh	R/W	I2C mapping[15:8]: Higher byte of Mapping mode buffer address	0x9f

8.2.4 I2C Slave mode

The I2C of the ST17H30Q can only be used as Slave. I2C slave address could be configured in I2CID (address 0x01) [7:1].

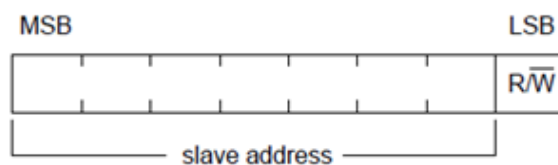




Figure 8- 3 I2C slave address

In I2C Slave mode, Master could initiate transaction anytime. I2C slave module will reply ACK automatically.

Sub modes including Direct Memory Access (DMA) mode, Mapping mode and a specific “Command Analysis” mode are supported. The latter is designed specially for the user who wants to define and use his own I2C protocol and read/write format.

8.2.4.1 DMA mode

In DMA mode, other devices (Master) could read/write Register and/or SRAM of the ST17H30Q via I2C protocol, and initial access address is specified by I2C Master. In this mode, I2C Slave will execute the read/write command from I2C Master automatically. But user needs to notice that the lowest system clock shall be 10x faster than I2C bit rate.

The access address is offset by 0x800000. In ST17H30Q, Register address starts from 0x800000 and SRAM address starts from 0x808000. For example, if Addr(High) is 0xaa and Addr(Low) is 0xcc, the real address of accessed data is 0x80aacc.

Master could access data of the ST17H30Q via I2C byte by byte, and access address supports automatical increment by setting address 0x03[0] to 1.

Read Format in DMA mode

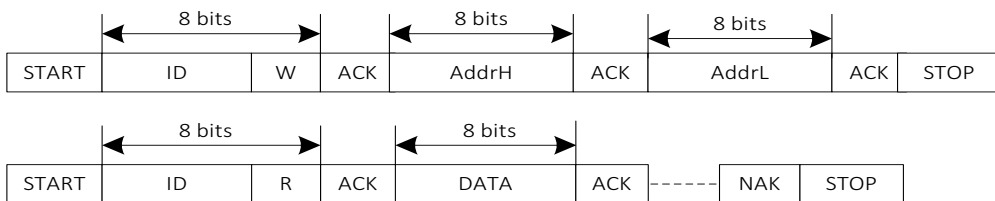


Figure 8- 4 Read format in I2C DMA mode

Write Format in DMA mode





Figure 8- 5 Write format in I2C DMA mode

8.2.4.2 Mapping mode

Address 0x03[2] should be set to 1b'1 to enable Mapping mode.

In Mapping mode, data written and read by I2C master will be redirected to specified 128-byte buffer in SRAM. The initial address of the 128-byte buffer is configurable via addresses 0x3e~0x3f. Address 0x3e is lower byte and address 0x3f is higher byte. The first 64-byte buffer is for written data and following 64-byte buffer is for read data. Every time the data access will start from the beginning of the Write-buffer/Read buffer after I2C stop condition occurs.

Read Format in mapping mode




Figure 8- 6 Read format in I2C Mapping mode

Write Format in mapping mode




Figure 8- 7 Write format in I2C Mapping mode

8.2.4.3 Command analysis mode

For I2C Master that uses self-defined I2C protocol and read/write format, a specific “Command Analysis” mode is supported by the I2C of the ST17H30Q (Slave).

I2C Master should specify initial access address as 0x20 (offset by 0x800000) in DMA mode, or configure mapping mode buffer address registers (addresses 0x3e~0x3f) as 0x800020 in mapping mode, by sending command to I2C Slave. I2C Slave supports command analysis function. By reading address 0x21[2:1], user can know whether the I2C Master operation that just happened is read or write operation.



8.3 SWS

The ST17H30Q supports SWS (Single Wire Slave) interface which represents the slave device of the single wire communication system developed by Lenze. The maximum data rate can be up to 2Mbps.

8.4 Pull-up/Pull-down resistor

For the ST17H30QET24, the GPIOs including GP17~GP18, GP22~GP23 and GP31 support configurable 1M Ω /10K Ω pull-up resistor or 100K Ω pull-down resistor; the GPIOs including GP5 and GP9~GP10 support 100K Ω pull-down resistor. Related register configuration can be found in Table 8- 6. By default the pull-up and pull-down resistors are disabled.

Take the GP17 as an example: Setting analog register afe3V_reg08<1:0> to 2b'01/2b'10/2b'11 is to enable 1M Ω pull-up resistor/10K Ω pull-up resistor/100K Ω pull-down resistor respectively for GP17; Clearing the two bits disables pull-up and pull-down resistors for GP17.

Table 8- 6 3.3V analog registers related to Pull-up/Pull-down resistor

Address(bit)	Mnemonic	Reset value	Description
afe3V_reg08<1:0>	pullupdown_ctrl<1:0>	00	Wake up mux input GP17 pull up/down controls 00 -- No pull up/down resistor 01 -- 1M Ω pull-up resistor 10 -- 10k Ω pull-up resistor 11 -- 100k Ω pull-down resistor
afe3V_reg08<3:2>	pullupdown_ctrl<1:0>	00	Wake up mux input GP18 pull up/down controls 00 -- No pull up/down resistor 01 -- 1M Ω pull-up resistor 10 -- 10k Ω pull-up resistor 11 -- 100k Ω pull-down resistor
afe3V_reg08<5:4>	pullupdown_ctrl<1:0>	00	reserved
afe3V_reg08<7:6>	pullupdown_ctrl<1:0>	00	reserved
afe3V_reg09<1:0>	pullupdown_ctrl<1:0>	00	reserved



Address(bit)	Mnemonic	Reset value	Description
afe3V_reg09<3:2>	pullupdown_ctrl<1:0>	00	Wake up mux input GP22 pull up/down controls 00 -- No pull up/down resistor 01 -- 1MOhm pull-up resistor 10 – 10kOhm pull-up resistor 11 – 100kOhm pull-down resistor
afe3V_reg09<5:4>	pullupdown_ctrl<1:0>	00	Wake up mux input GP23 pull up/down controls 00 -- No pull up/down resistor 01 -- 1MOhm pull-up resistor 10 – 10kOhm pull-up resistor 11 – 100kOhm pull-down resistor
afe3V_reg09<7:6>	pullupdown_ctrl<1:0>	00	reserved
afe3V_reg40<7:0>	pulldown_ctrl<7:0>	00000 000	GP6 ~GP0, GP32 pull down enable 0--No pull down resistor 1--enable 100kOhm pull down resistor
afe3V_reg41<7:0>	pulldown_ctrl<15:8>	00000 000	GP14 ~GP7 pull down enable 0--No pull down resistor 1--enable 100kOhm pull down resistor
afe3V_reg42<1:0>	pulldown_ctrl<17:16>	00	reserved
afe3V_reg42<3:2>	pullupdown_ctrl<1:0>	00	reserved
afe3V_reg42<5:4>	pullupdown_ctrl<1:0>	00	reserved
afe3V_reg42<7:6>	pullupdown_ctrl<1:0>	00	Wake up mux input GP31 pull up/down controls 00 -- No pull up/down resistor 01 -- 1MOhm pull-up resistor 10 – 10kOhm pull-up resistor 11 – 100kOhm pull-down resistor



9 Quadrature Decoder

The ST17H30Q embeds one quadrature decoder (QDEC) which is designed mainly for applications such as wheel. The QDEC implements debounce function to filter out jitter on the two phase inputs, and generates smooth square waves for the two phase.

9.1 Input pin selection

The QDEC supports two phase input; each input is selectable from the 6 dedicated GPIOs including GP17~GP18, GP22~GP23 and GP30~GP31 via setting address 0xd2[4:0] (for channel a)/0xd3[4:0] (for channel b).

Table 9- 1 Input pin selection

Address 0xd2[4:0]/0xd3[4:0]	Pin
0	Reserved (GP16)
1	GP17
2	GP18
3	Reserved (GP19)
4	Reserved (GP20)
5	Reserved (GP21)
6	GP22
7	GP23
8	Reserved (GP24)
9	Reserved (GP25)
10	Reserved (GP26)
11	Reserved (GP27)
12	Reserved (GP28)
13	Reserved (GP29)
14	GP30
15	GP31

9.2 Common mode and double accuracy mode

The QDEC embeds an internal hardware counter, which is not connected with bus.

Address 0xd7[0] serves to select common mode or double accuracy mode.

For each wheel rolling step, two pulse edges (rising edge or falling edge) are generated.



If address 0xd7[0] is cleared to select common mode, the QDEC Counter value (real time counting value) is increased/decreased by 1 only when the same rising/falling edges are detected from the two phase signals.

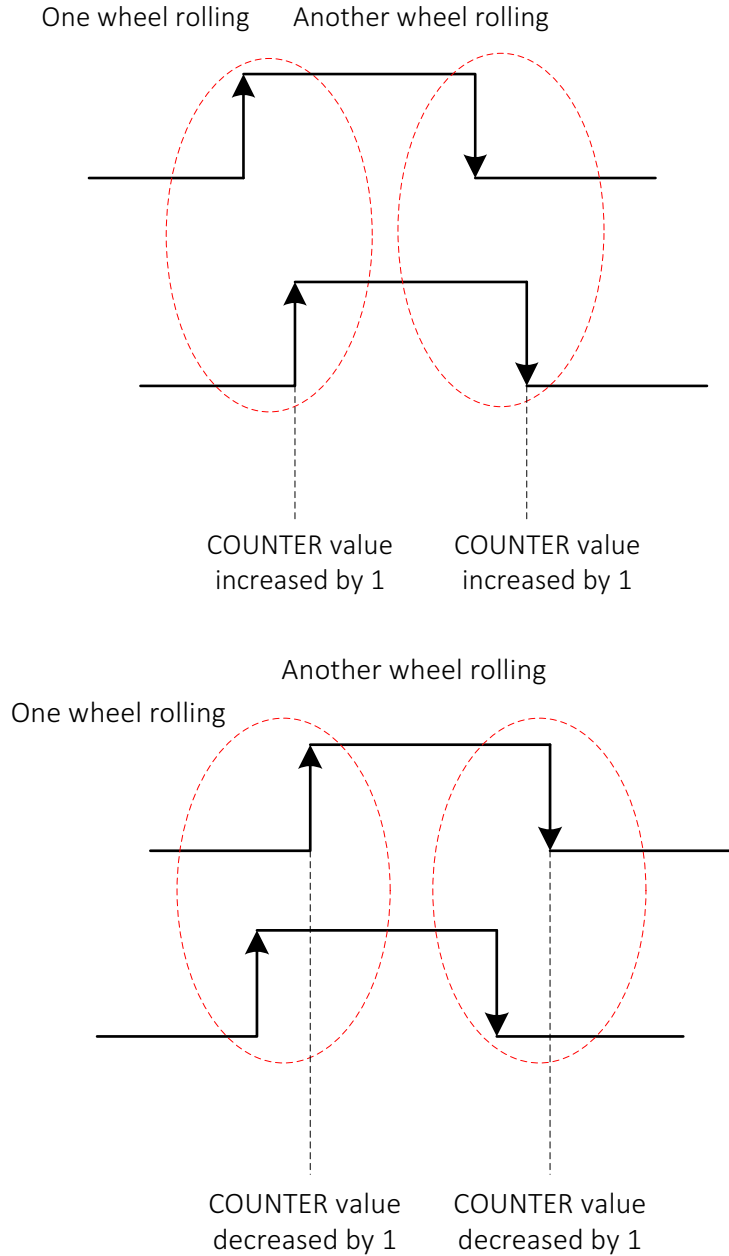


Figure 9- 1 Common mode

If address 0xd7[0] is set to 1b'1 to select double accuracy mode, the QDEC Counter value (real time counting value) is increased/decreased by 1 on each rising/falling edge of the two phase signals; the QDEC Counter value will be increased/decreased by 2 for one wheel rolling.

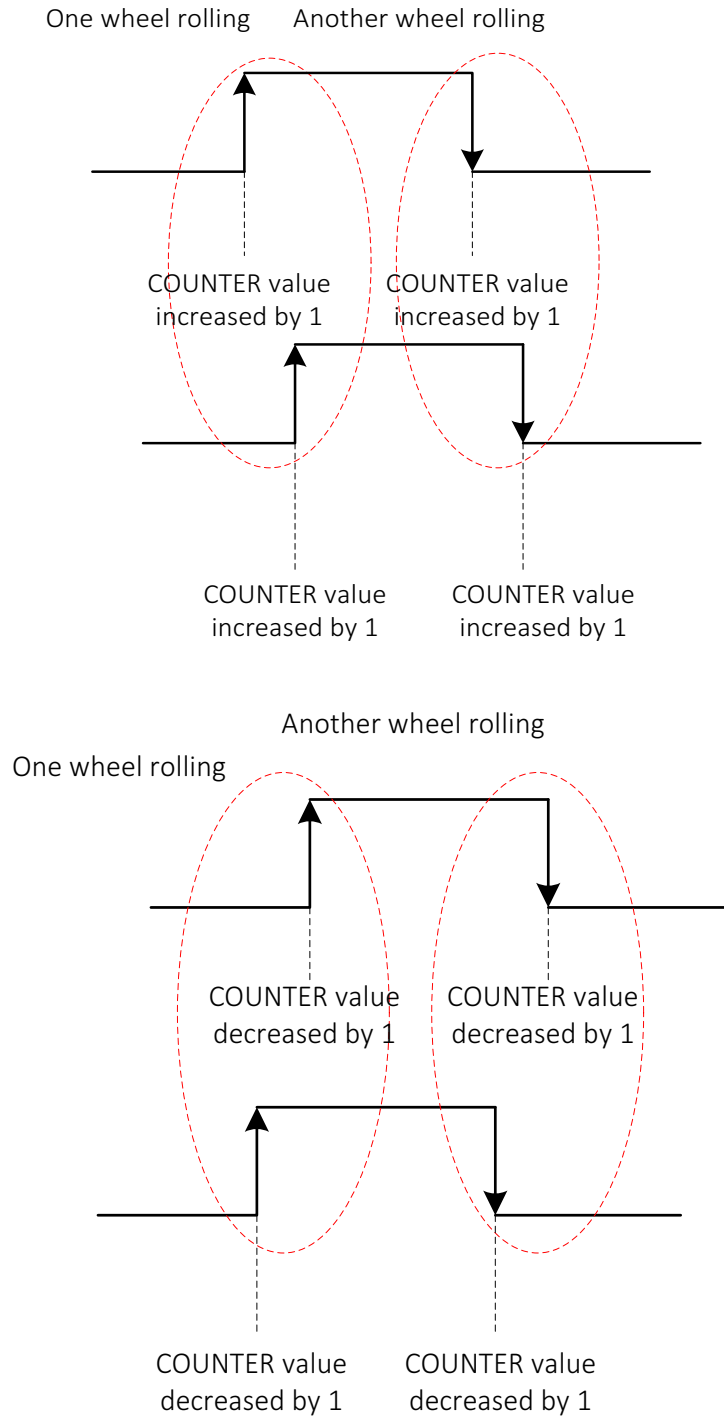


Figure 9- 2 Double accuracy mode

9.3 Read real time counting value

Neither can Hardware Counter value be read directly via software, nor can the counting value in address 0xd0 be updated automatically.

To read real time counting value, first write address 0xd8[0] with 1b'1 to load



Hardware Counter data into the QDEC_COUNT register, then read address 0xd0.

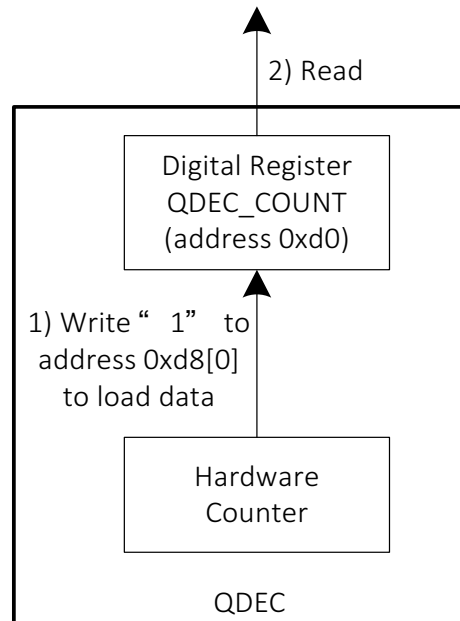


Figure 9- 3 Read real time counting value

9.4 QDEC interrupt

Address 0xd4[0] serves to enable or mask QDEC interrupt.

If address 0xd4[0] is set to 1b'1 to enable QDEC interrupt, whenever counter value changes, an QDEC IRQ is asserted and address 0xd5[0] is set to 1b'1 automatically. Writing 1b'1 to address 0xd5[0] can clear the interrupt flag bit.

9.5 QDEC reset

Address 0xd6[0] serves to reset the QDEC. The QDEC Counter value is cleared to zero.

9.6 Other configuration

The QDEC supports hardware debouncing. Address 0xd1[2:0] serves to set filtering window duration. All jitter with period less than the value will be filtered out and thus does not trigger count change.

Address 0xd1[4] serves to set input signal initial polarity.



Address 0xd1[5] serves to enable shuttle mode. Shuttle mode allows non-overlapping two phase signals as shown in the following figure.

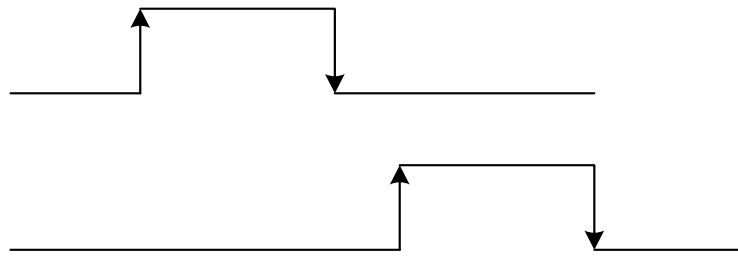


Figure 9- 4 Shuttle mode

9.7 Register table

Table 9- 2 Register table for QDEC

Address	Mnemonic	Type	Description	Reset value
0xd0	QDEC_COUNT	R	QDEC Counting value (read to clear): Pulse edge number	
0xd1	QDEC_CC	R/W	[2:0] : filter time (can filter $2^n * clk_32k * 2$ width de glitch) [4]: pola, input signal pola 0: no signal is low, 1: no signal is high [5]:shuttle mode 1 to enable shuttle mode	
0xd2	QDEC_CHNA0	R/W	[4:0] QDEC0 input pin select for channel a choose 1 of 6 pins for input channel a	0x00
0xd3	QDEC_CHNB0	R/W	[4:0] QDEC0 input pin select for channel b choose 1 of 6 pins for input channel b	0x01
0xd4	QDEC_MASK	R/W	[0]Interrupt mask 1: enable 0: mask	0x00
0xd5	QDEC_INT	R	[0]Interrupt flag Write 1 to clear	
0xd6	QDEC_RST	R/W	[0]Write 1 to reset QDEC	0x0
0xd7	QDEC_DOUBLE	R/W	[0]Enable double accuracy mode	0x0
0xd8	DATA_LOAD	R/W	[0]write 1 to load data when load completes it will be 0	



10 SAR ADC

The ST17H30Q integrates one ADC module, which can be used to sample battery voltage and external analog input.

10.1 Register table

Table 10- 1 Register table for SAR ADC

Address	Mnemonic	Type	Description	Reset Value
Digital Registers				
0x2b	ADCREF	RW	[0]select reference 0: Vbg 1: VDDH [7:1] rsvd	0x03
0x2c	ADCMUXM	RW	Analog inputs select bit [2:0] sel ana input 000: close all 001: GP17 010: GP18 011: GP22 100: GP23 101: VDDDEC 110: V_{GP23} or $1/3 * V_{GP23}$. Refer to analog register afe3V_reg02<3>. 111: reserved [5:4] sel dif input choose single or diff mode and select negative input 00: single mode 01: GP18 as negative input 10: GP23 as negative input 11: VDDDEC as negative input	0x02
0x35	ADC_RUN	R/W	[7] manual mode run signal	0
0x38	ADC_DAT[7:0]	R		
0x39	ADC_DAT[9:8]	R	[1:0] ADC_DAT[9:8] [6:2] rsvd [7] adc_busy	
0x3c	ADC TSAPM	RW	[2:0] Select number of clock cycles for ADC sampling	0x00



Address	Mnemonic	Type	Description	Reset Value
			Setting # of clock cycles 000 3 001 6 010 9 011 12 100 18 101 24 110 48 111 144 [4:3] ADC resolution select 00:7bit 01:8bit 10:9bit 11:10bit [5] Select sign of ADC output data bit<9> 0: positive 1: negative	
Analog registers				
afe3V_reg 06<0>	Power Down	RW	Power down SAR ADC 1: Power down 0: Power up	1
afe3V_reg 02<3>	power_logic_sel _atb	RW	Select V _{GP23} or 1/3*V _{GP23} as ADC input (refer to digital register 0x2c[2:0]). 0: V _{GP23} 1: 1/3*V _{GP23}	0

10.2 SAR ADC clock

ADC clock derives from FHS. Address 0x6b[7] should be set to “1” to enable ADC clock.

ADC clock must be lower than 5M when ADC reference voltage is selected as VDDH and must be lower than 4M when ADC reference voltage is selected as Vbg.

ADC clock is calculated according to the formula below:

$$F_{\text{ADC clock}} = F_{\text{FHS}} * \text{adc_step}[10:0] / \text{adc_mod}[11:0]$$

Refer to **Section 5.2.1 SAR ADC clock** for details.

10.3 Select ADC range, resolution and sampling time

ADC range is same as the ADC reference voltage, which is configured by register



0x2b[0]: Vbg (1.26V bandgap reference), or VDDH.

Address 0x3c[4:3] serves to set resolution: 7bit, 8bit, 9bit or 10bit. ADC data format is always 10bit no matter the conversion bit is set. Address 0x3c[5] serves to set the sign of ADC output data bit[9] as positive or negative. For example, 8 bits resolution indicates higher 8 bits are valid bits and the lower 2 bits are invalid bits.

ADC sampling time can be configured by address 0x3c[2:0], the lower sampling cycle, the shorter ADC convert time.

10.4 Select input mode and channel

The ST17H30Q ADC has up to 4 input channel which can be selected by address 0x2c[2:0].

Address 0x2c[5:4] serves to select differential mode or single-end input mode.

When address 0x2c[5:4] is set to 2b'00 to select single-end mode, 0x2c[2:0] serves to select input channel.

For example, if address 0x2c is set to 0x06 (i.e. 8b' 00000110), and analog register afe3V_reg02<3> is set to 1b'1, $1/3 * V_{GP23}$ is selected as ADC input of single-end mode.

When address 0x2c[5:4] is set to 2b'01/2b'10/2b'11, differential mode is selected, the corresponding channel identified by address 0x2c[5:4] is selected as negative input, and the positive input is selectable via address 0x2c[2:0].

For example, if address 0x2c is set to 0x11 (i.e. 8b'00010001), GP17 and GP18 are selected as positive-end and negative-end input of differential mode; actual input signal for ADC is the difference of V_{GP17} and V_{GP18} (i.e. V_{GP17} minus V_{GP18}).

10.5 ADC start

Address 0x35[7] set to "1" starts ADC sampling and conversion process.

10.6 ADC status

ADC busy flag bit, i.e. address 0x39[7], indicates whether ADC is busy.



10.7 ADC data

The real time output data ADC_DAT[9:0] can be read from addresses 0x39~0x38.

11 PWM

The ST17H30Q supports up to 4-channel PWM (Pulse-Width-Modulation) output. PWM#n_INV indicates inverted output corresponding to PWM#n.

11.1 Register table

Table 11- 1 Register table for PWM

Address	Mnemonic	Type	Description	Reset Value
0x780	PWM_EN	R/W	[0]: 0--disable PWM0, 1--enable PWM0 [1]: 0--disable PWM1, 1--enable PWM1 [2]: 0--disable PWM2, 1--enable PWM2 [3]: 0--disable PWM3, 1--enable PWM3	0x00
0x781	PWM_CLK	R/W	(PWM_CLK+1)*sys_clk	0x00
0x782	PWM_MODE	R/W	[1:0]: 00-pwm0 normal mode [1:0]: 01-pwm0 count mode [1:0]: 11-reserved	0x00
0x783	PWM_CC0	R/W	[3:0]:1'b1 invert PWM output	0x00
0x784	PWM_CC1	R/W	[3:0]:1'b1 invert PWM_INV output	0x00
0x785	PWM_CC2	R/W	[3:0]:1'b1 PWM' pola,low level first	0x00
0x788	PWM_PHASE0	R/W	[7:0] bits 7-0 of PWM0's phase time	0x00
0x789	PWM_PHASE0	R/W	[15:8] bits 15-8 of PWM0's phase time	0x00
0x78a	PWM_PHASE1	R/W	[7:0] bits 7-0 of PWM1's phase time	0x00
0x78b	PWM_PHASE1	R/W	[7:8] bits 15-8 of PWM1's phase time	0x00
0x78c	PWM_PHASE2	R/W	[7:0] bits 7-0 of PWM2's phase time	0x00
0x78d	PWM_PHASE2	R/W	[15:8] bits 15-8 of PWM2's phase time	0x00
0x78e	PWM_PHASE3	R/W	[7:0] bits 7-0 of PWM3's phase time	0x00
0x78f	PWM_PHASE3	R/W	[15:8] bits 15-8 of PWM3's phase time	0x00
0x794	PWM_TCMP0	R/W	[7:0] bits 7-0 of PWM0's high time or low time(if pola[0]=1)	0x00
0x795	PWM_TCMP0	R/W	[15:8] bits 15-8 of PWM0's high time or low time	0x00
0x796	PWM_TMAX0	R/W	[7:0] bits 7-0 of PWM0's cycle time	0x00
0x797	PWM_TMAX0	R/W	[15:8] bits 15-8 of PWM0's cycle time	0x00



Address	Mnemonic	Type	Description	Reset Value
0x798	PWM_TCMP1	R/W	[7:0] bits 7-0 of PWM1's high time or low time(if pola[1]=1)	0x00
0x799	PWM_TCMP1	R/W	[15:8] bits 15-8 of PWM1's high time or low time	0x00
0x79a	PWM_TMAX1	R/W	[7:0] bits 7-0 of PWM1's cycle time	0x00
0x79b	PWM_TMAX1	R/W	[15:8] bits 15-8 of PWM1's cycle time	0x00
0x79c	PWM_TCMP2	R/W	[7:0] bits 7-0 of PWM2's high time or low time(if pola[2]=1)	0x00
0x79d	PWM_TCMP2	R/W	[15:8] bits 15-8 of PWM2's high time or low time	0x00
0x79e	PWM_TMAX2	R/W	[7:0] bits 7-0 of PWM2's cycle time	0x00
0x79f	PWM_TMAX2	R/W	[15:8] bits 15-8 of PWM2's cycle time	0x00
0x7a0	PWM_TCMP3	R/W	[7:0] bits 7-0 of PWM3's high time or low time(if pola[3]=1)	0x00
0x7a1	PWM_TCMP3	R/W	[15:8] bits 15-8 of PWM3's high time or low time	0x00
0x7a2	PWM_TMAX3	R/W	[7:0] bits 7-0 of PWM3's cycle time	0x00
0x7a3	PWM_TMAX3	R/W	[15:8] bits 15-8 of PWM3's cycle time	0x00
0x7ac	PWM_PNUM0	R/W	[7:0]PWM0 Pulse num in count mode	0x00
0x7ad	PWM_PNUM0	R/W	[15:8]	0x00
0x7b0	PWM_MASK	R/W	INT mask [0] PWM0 Pnum int 0: disable 1: Enable [1] rsvd [2] PWM0 frame int 0: disable 1: Enable [3] PWM1 frame int 0: disable 1: Enable [4] PWM2 frame int 0: disable 1: Enable [5] PWM3 frame int 0: disable 1: Enable [7:6] rsvd	0x00
0x7b1	PWM_INT	R/W	INT status ,write 1 to clear [0]:PWM0 pnum int(have sent PNUM pulse,PWM_NCNT==PWM_PNUM) [1]:rsvd [2]:PWM0 cycle done int(PWM_CNT==PWM_TMAX)	0x00



Address	Mnemonic	Type	Description	Reset Value
			[3]:PWM1 cycle done int(PWM_CNT==PWM_TMAX) [4]:PWM2 cycle done int(PWM_CNT==PWM_TMAX) [5]:PWM3 cycle done int(PWM_CNT==PWM_TMAX) [7:6]: rsvd	
0x7b4	PWM_CNT0	R	[7:0]PWM 0 cnt value	
0x7b5	PWM_CNT0		[15:8]PWM 0 cnt value	
0x7b6	PWM_CNT1	R	[7:0]PWM 1 cnt value	
0x7b7	PWM_CNT1		[15:8]PWM 1 cnt value	
0x7b8	PWM_CNT2	R	[7:0]PWM 2 cnt value	
0x7b9	PWM_CNT2		[15:8]PWM 2 cnt value	
0x7ba	PWM_CNT3	R	[7:0]PWM 3 cnt value	
0x7bb	PWM_CNT3		[15:8]PWM 3 cnt value	
0x7c0	PWM_NCNT0	R	[7:0]PWM0 pluse_cnt value	
0x7c1	PWM_NCNT0		[15:8]PWM0 pluse_cnt value	

11.2 Enable PWM

Register PWM_EN (address 0x780)[3:0] serves to enable PWM3~PWM0 respectively via writing “1” for the corresponding bits.

11.3 Set PWM clock

PWM clock derives from system clock. Register PWM_CLK (address 0x781) serves to set the frequency dividing factor for PWM clock. Formula below applies:

$$F_{PWM} = F_{System\ clock} / (PWM_CLK + 1)$$

11.4 PWM waveform, polarity and output inversion

Each PWM channel has independent counter and three status including “Delay”, “Count” and “Remaining”. Count and Remaining status form a signal frame.



11.4.1 PWM waveform

When PWM#n is enabled, PWM#n enters Delay status. By default PWM#n outputs Low level at Delay status. The Delay status duration, i.e. Phase time, is configured in register PWM_PHASE#n (address 0x788~0x78f). Phase difference between PWM channels is allowed by different phase time configuration.

After Phase time expires, PWM#n exits Delay status and starts to send signal frames. First PWM#n is at Count status and outputs High level signal by default. When PWM#n counter reaches cycles set in register PWM_TCMP#n (address 0x794~0x795, 0x798~0x799, 0x79c~0x79d, 0x7a0~0x7a1), PWM#n enters Remaining status and outputs Low level till PWM#n cycle time configured in register PWM_TMAX#n (address 0x796~0x797, 0x79a~0x79b, 0x79e~0x79f, 0x7a2~0x7a3) expires.

An interruption will be generated at the end of each signal frame if enabled via register PWM_MASK (address 0x7b0[2:5]).

11.4.2 Invert PWM output

PWM#n and PWM#n_INV output could be inverted independently via register PWM_CC0 (address 0x783[3:0]) and PWM_CC1 (address 0x784[3:0]). When the inversion bit is enabled, the corresponding PWM channel waveform will be inverted completely.

11.4.3 Polarity for signal frame

By default, PWM#n outputs High level at Count status and Low level at Remaining status. When the corresponding polarity bit is enabled via register PWM_CC2 (address 0x785[3:0]), PWM#n will output Low level at Count status and High level at Remaining status.

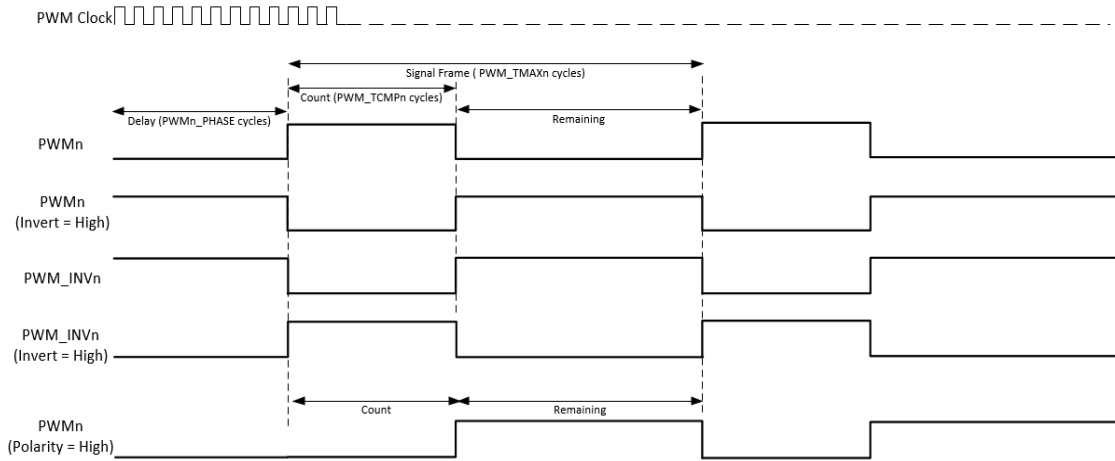


Figure 11- 1 PWM output waveform chart

11.5 PWM mode

11.5.1 Select PWM mode

PWM0 supports 2 modes, including Continuous (normal) mode and Counting mode. PWM1~PWM3 only support Continuous mode.

Register PWM_MODE (address 0x782[1:0]) serves to select PWM0 mode.

11.5.2 Continuous mode

PWM0~PWM3 all support Continuous mode. In this mode, PWM#n continuously sends out signal frames. PWM#n should be disabled via address 0x780 to stop it; when stopped, the PWM output will turn low immediately.

During Continuous mode, waveform could be changed freely. New configuration for PWM_TCMPln and PWM_TMAX#n will take effect in the next signal frame.

A frame interruption will be generated (if enabled) after each signal frame is finished.

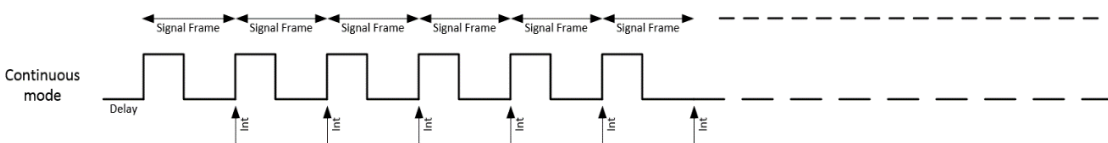


Figure 11- 2 Continuous mode



11.5.3 Counting mode

Only PWM0 supports Counting mode. In this mode, PWM0 sends out specified number of signal frames which is defined as a pulse group. The number is configured via register PWM_PNUM0 (address 0x7ac~0x7ad). After a pulse group is finished, PWM0 will be disabled automatically, and a Pnum interruption will be generated if enabled via register PWM_MASK (address 0x7b0[0]).

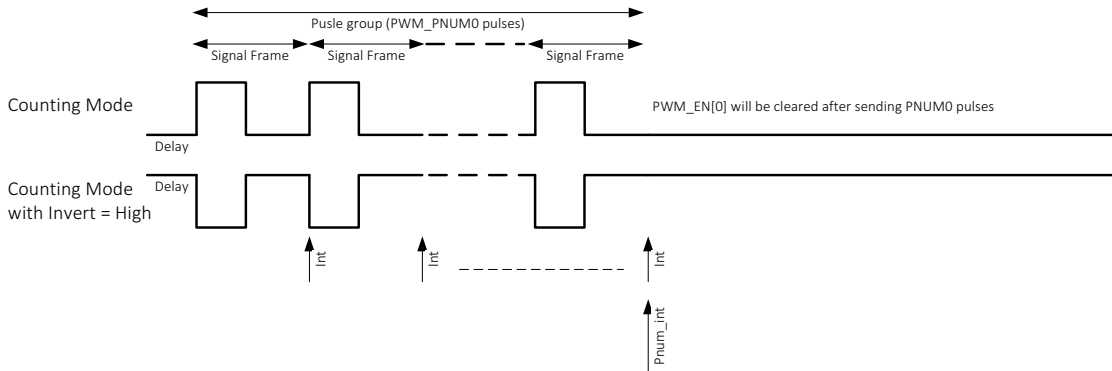


Figure 11- 3 Counting mode

11.6 PWM interrupt

There are 5 interrupt sources from PWM function. After each signal frame, PWM#n will generate a frame-done IRQ (Interrupt Request) signal. In Counting mode, PWM0 will generate a Pnum IRQ signal after completing a pulse group. Interrupt status can be cleared via register PWM_INT (address 0x7b1).

12 Key Electrical Specifications

12.1 Absolute maximum ratings

Table 12- 1 Absolute Maximum Ratings

Characteristics	Sym.	Min.	Max	Unit	Test Condition
-----------------	------	------	-----	------	----------------



Supply Voltage	VDD	-0.3	3.9	V	All AVDD and DVDD pin must have the same voltage
Voltage on Input Pin	V _{In}	-0.3	VDD +0.3	V	
Output Voltage	V _{Out}	0	VDD	V	
Storage temperature Range	T _{Str}	-65	150	°C	
Soldering Temperature	T _{Sld}		260	°C	

CAUTION: Stresses above those listed in “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

12.2 Recommended operating condition

Table 12- 2 Recommended operation condition

Item	Sym.	Min	Typ.	Max	Unit	Condition
Power-supply voltage	VDD	1.9	3.3	3.6	V	
Operating Temperature Range	T _{Opr}	-40	27	85	°C	

12.3 DC characteristics

Table 12- 3 DC characteristics

Item	Sym.	Min	Typ.	Max	Unit	Condition
Tx current	I _{Tx}	-	15	-	mA	Continuous Tx transmission @0dBm output power
		-	22	-	mA	Continuous Tx transmission @maximum output power



Rx current	I_{Rx}	-	12	-	mA	Continuous Rx reception
Suspend current	I_{Susp}	-	10	-	uA	
Deep sleep current	I_{Deep}	-	0.7	-	uA	

*Note: All tests above are done at room temperature ($T=25^{\circ}C$).

12.4 AC characteristics

Table 12- 4 AC Characteristics

Item	Sym.	Min	Typ.	Max	Unit	Condition
Digital inputs/outputs						
Input high voltage	V_{IH}	0.7VDD		VDD	V	
Input low voltage	V_{IL}	VSS		0.3VDD	V	
Output high voltage	V_{OH}	VDD-0.3		VDD	V	
Output low voltage	V_{OL}	VSS		0.3	V	
RF performance (1Mbps)						
Item		Min	Typ	Max	Unit	
RF_Rx performance						
Sensitivity	1Mbps		-94		dBm	
Frequency Offset Tolerance		-300		300	KHz	
Co-channel rejection			-3		dB	
In-band blocking rejection	± 1 MHz offset		3		dB	



Item	Sym.	Min	Typ.	Max	Unit	Condition
(Single Tone Interference)	-2 MHz offset		33		dB	
	+2 MHz offset		30		dB	
	-3 MHz offset		33		dB	
	+3 MHz offset		34		dB	
	>4MHz offset		35		dB	
In-band blocking rejection (Equal Modulation Interference)	±1MHz offset		-3		dB	
	-2 MHz offset		26		dB	
	+2 MHz offset		22		dB	
	-3 MHz offset		31		dB	
	+3 MHz offset		35		dB	
	>4MHz offset		32		dB	
Image rejection			44		dB	
RF_Tx performance						
Output power				6	dBm	
Modulation 20dB bandwidth			1.3		MHz	



Item	Sym.	Min	Typ.	Max	Unit	Condition
16MHz crystal						
Nominal frequency (parallel resonant)	f_{NOM}		16		MHz	
Frequency tolerance	f_{TOL}	-60		+60	ppm	
Load capacitance	C_L	5	12	18	pF	Programmable on chip load cap
Equivalent series resistance	ESR		50	100	ohm	
32MHz RC oscillator						
Nominal frequency	f_{NOM}		32		MHz	
Frequency tolerance	f_{TOL}		1		%	On chip calibration
32kHz RC oscillator						
Nominal frequency	f_{NOM}		32		kHz	
Frequency tolerance	f_{TOL}		0.03		%	On chip calibration
Calibration time			3		ms	
ADC						
Differential nonlinearity	DNL		0.8		LSB	
Integral nonlinearity	INL		0.7		LSB	
Signal-to-noise and distortion ratio ($f_{\text{in}}=1\text{kHz}$, $f_{\text{S}}=16\text{kHz}$)	SINAD		57.8		dB	
Spurious free	SFDR		64.5		dB	



Item	Sym.	Min	Typ.	Max	Unit	Condition
dynamic range (fin=1kHz, fS=16kHz)						
Effective Number of Bits	ENOB		9.2		bits	
Sampling frequency	Fs			250	KHz	VDDH reference
				200	KHz	Vbg reference

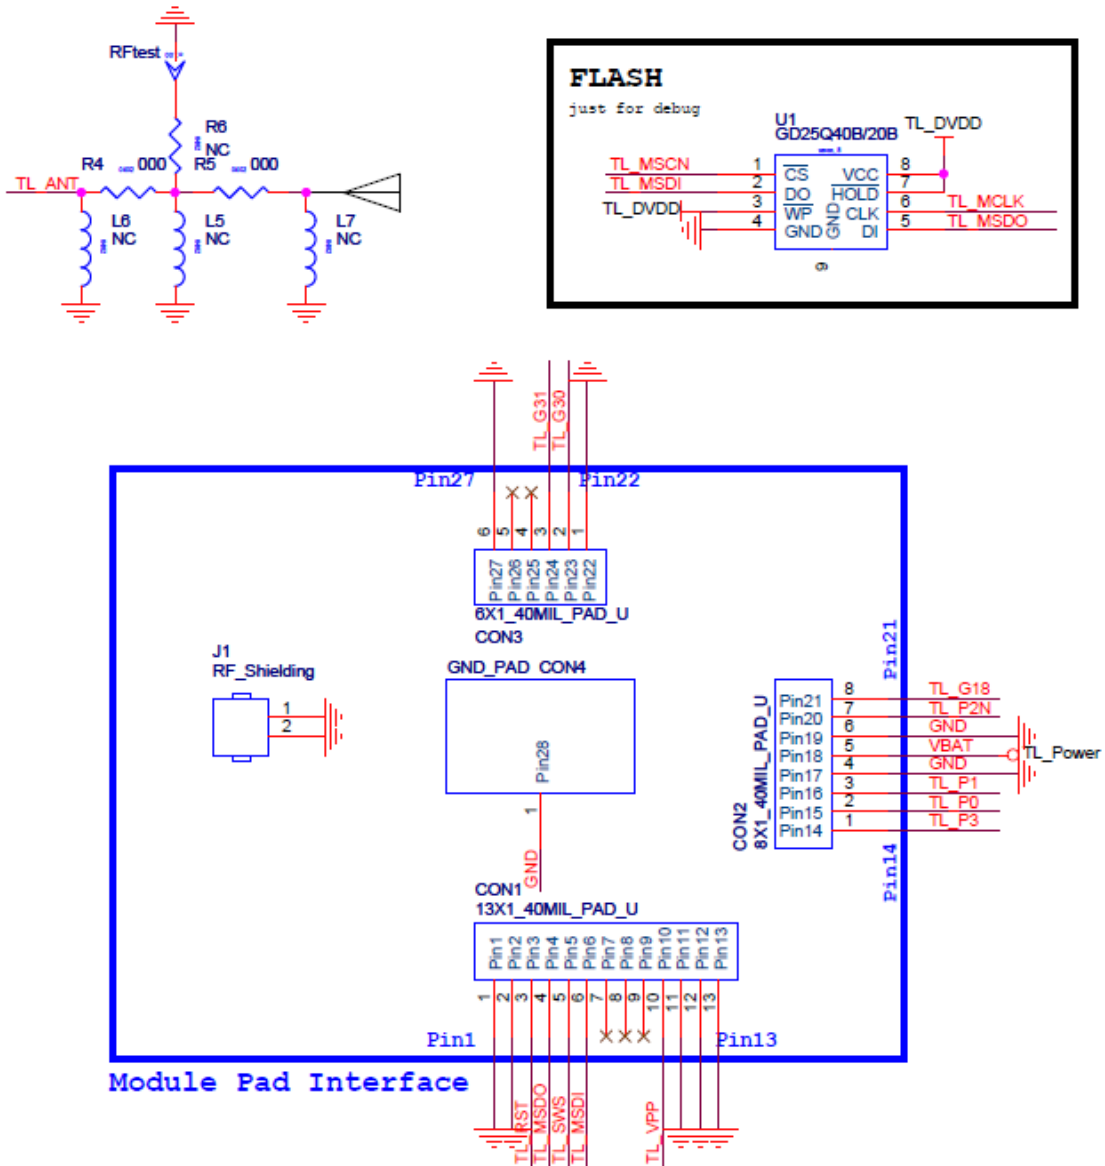


Figure 13- 1 Schematic for the ST17H30QET24



13.1.2 Layout

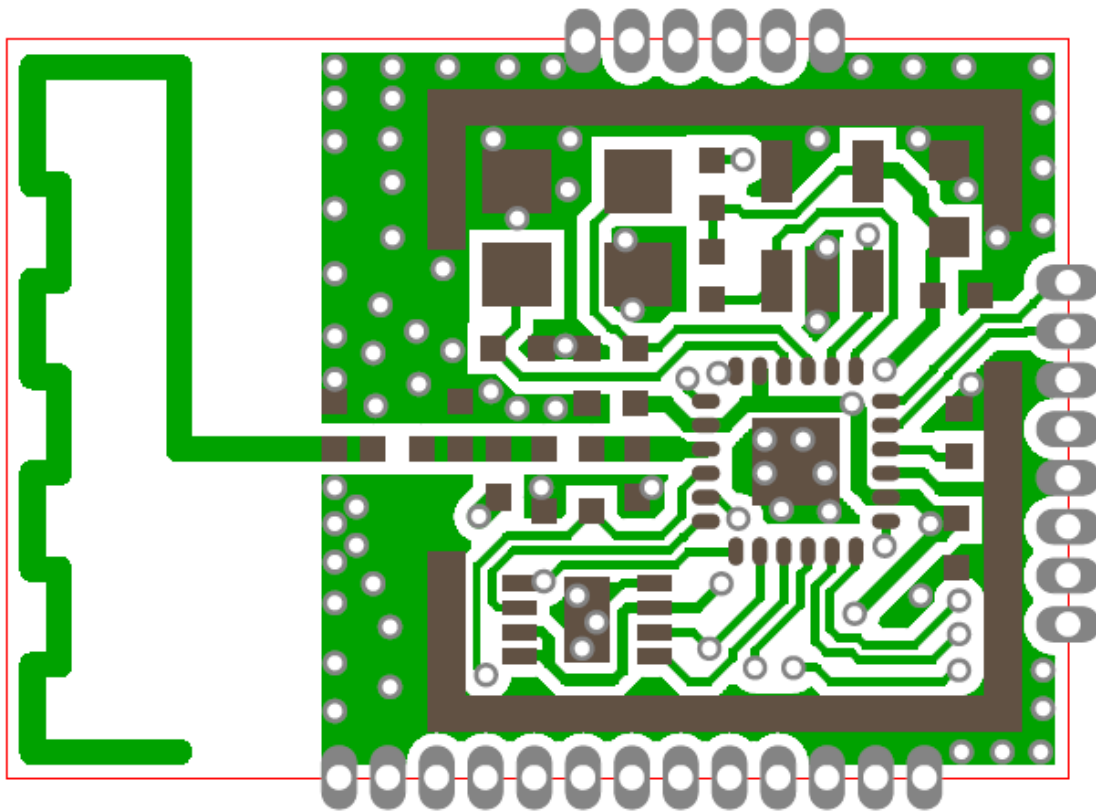


Figure 13- 2 Layout for the ST17H30QET24

13.1.3 BOM (Bill of Material)

Table 13- 1 BOM table for the ST17H30QET24

Quantity	Reference	Value	Spec
5	C26	1uF	0402
	C27	1uF	0402
	C28	1uF	0402
	C30	1uF	0402
	C31	1uF	0402
1	C29	10uF	0603
2	R4	0	0402
	R5	0	0402
2	R7	3.3K	0402
	R8	3.3K	0402
1	U2	FM24C04B	FM24C04B
1	U4	ST17H30QET24	ST17H30QET24
1	Y1	12MHZ	OSC_25x32_+/-20ppm_12pF_4pin